


EMN 20 .. 100 - D3 (3 phase Delta)

The EMN (Energy Meter Node) series is an AC energy submeter with a wireless mesh network communications output. The D3 is designed for three phase networks without the neutral and inter-phase voltage up to 300V rms. This module is compatible with the Mesh Gate L or XL.

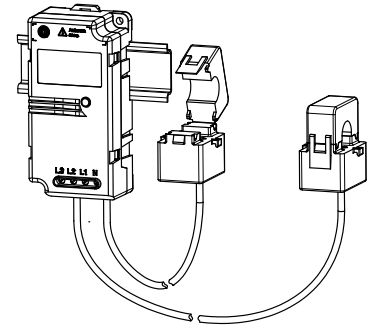

Electrical data

Symbol	Description	Types	
I_{PN}	Primary nominal current rms (A)	EMN 20 D3	20
		EMN 100 D3	100
I_{PM}	Primary current, measuring range (of I_{PN})	120	%
V_{PM}	Primary voltage, measuring range (neutral/phase) ¹⁾	90 .. 300 ²⁾	V_{rms}
	Permanent overload voltage (neutral/phase)	300	V_{rms}
f	Frequency	50/60	Hz
S	Output signal: radio frequency communication ³⁾	see Mesh Gate datasheet	
	Power supply	Line powered between N-L1 inputs	
V_{PN}	Primary nominal, voltage (neutral/phase)	100 .. 272 ³⁾	V_{rms}
P_C	Maximum power consumption	2	W

Measurement Values

	Configurable reading interval: 5 .. 30 min Internal base includes						Cummulated values			
	L1			L3			SUM	L1	L3	SUM
	Av	Min	Max	Av	Min	Max				
Current (A)										
Voltage (V)										
Active Energy (KWh)										
Reactive Energy (kVarh)										
Apparent Energy (kVA)										

f Frequency measured in phase 1 (L1)

Accuracy

X	Accuracy: @ $T_A = 25^\circ C$	Max	
	Rms current @ I_{PN}	1.5	%
	Rms voltage @ V_P	1.5	%
	Active Energy (refer to IEC 62053-21 class 1) ⁴⁾	± 1	%
	Reactive Energy (refer to IEC 62053-23 class 3)	± 3	%

General data

T_A	Ambient operating temperature (90 % RH max)	- 10 .. + 55	°C
T_S	Ambient storage temperature	- 25 .. + 85	°C
m	Mass	400	g
IP_{xx}	Protection index	P 2X	
	Standards	EN 50178: 1997 IEC 61010-1: 2001	
	Range to Mesh Gate or Mesh Node (indoor, line of sight)	30	m

- Notes: ¹⁾ See connection diagram
²⁾ RF Certification: CE, FCC, IC, Japan (pending)
³⁾ Not designed for 230/400 nor 277/480 V_{rms} networks. For these networks, use EMN 200..2000-D3/SP2
⁴⁾ Class 1 guaranteed for Power Factor ≥ 0.65.

Features

- Wide range of electrical parameters measurement
- Wireless communication on license free 2.4 GHz-transmit RF power maximum EIRP: 10 dBm(10mW)
- Class 1 accuracy active energy.

Advantages

- Fast & easy mounting:
 - Wireless communication
 - Split core CT
 - Self powered from voltage line
- Compact
- Gateway interface: RS 232/485 Modbus RTU
- Ideal for retrofit applications.

Applications

- Energy sub-metering
- Network condition monitoring
- Energy audit & diagnostic
- Building energy management.

Application domain

- Energy solutions.

EMN 20 .. 100 - D3 (3 phase Delta)

Isolation characteristics



Isolation class II
IEC 61010-1 CAT III 300 V rms
Pollution degree: PD2

Safety

CB test Certificate N° FR 583050 IEC System for mutual recognition of test certificates for electrical equipment (IECEE) CB Scheme.



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.




Caution, risk of electrical shock: do not remove any parts of the EMN - D3



For current transformer (CT) mounting:
make sure that the power cable on which the CT will be attached is powered off.

Dimensions EMN 20 .. 100 - D3 (3 phase Delta) (in mm)

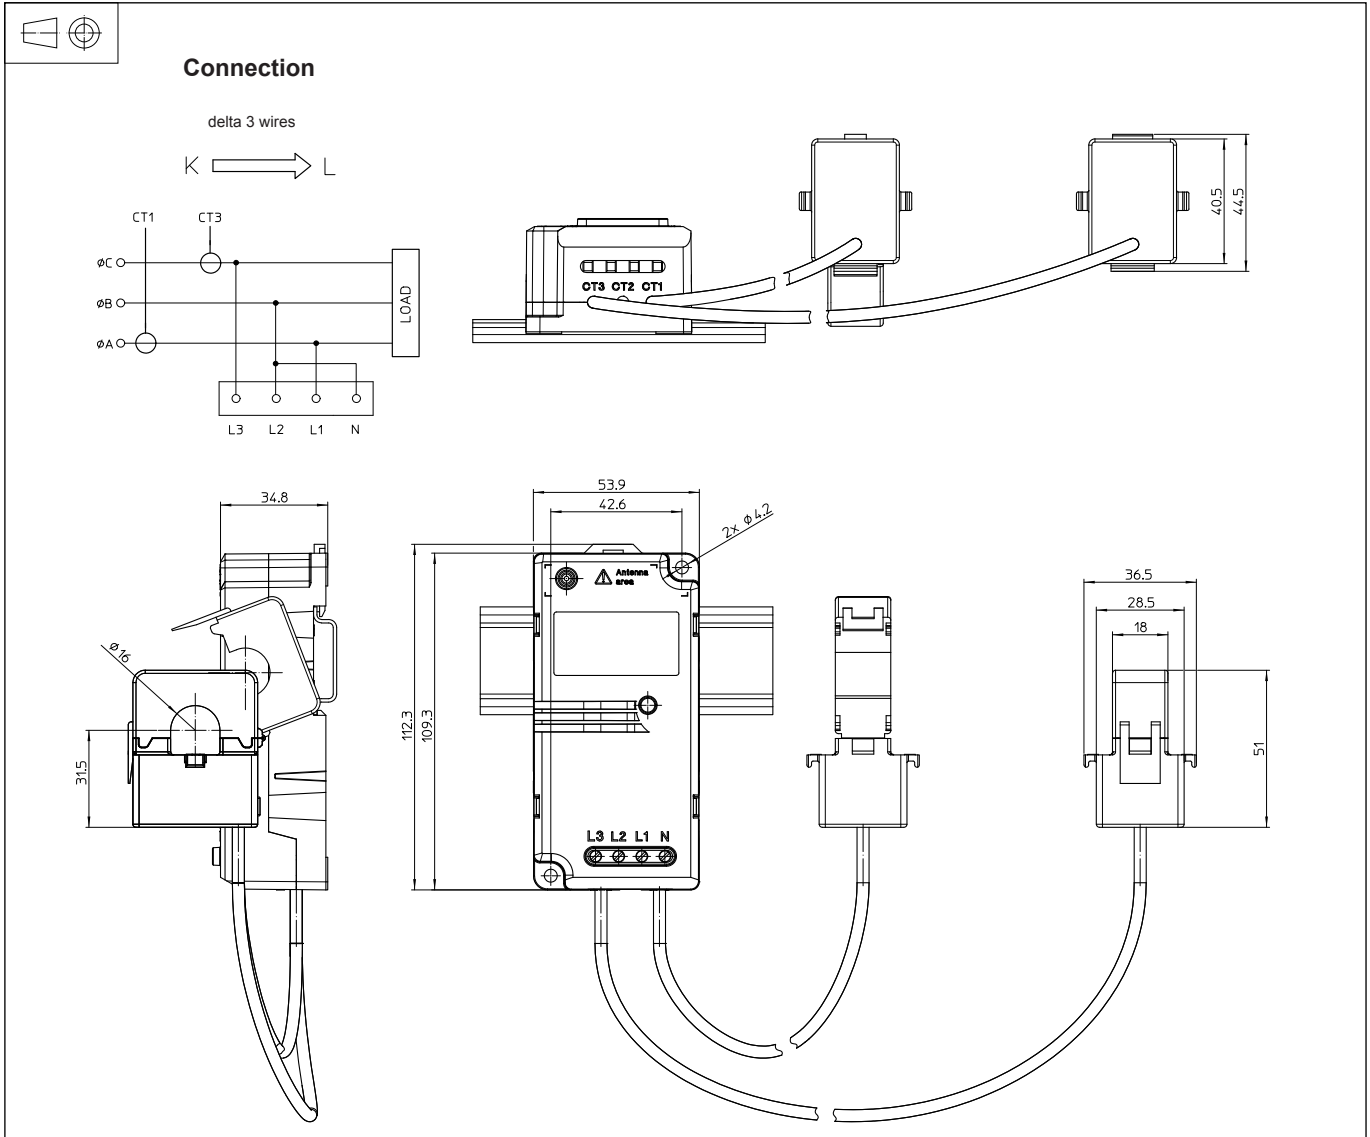

Mechanical characteristics

- General tolerance ± 1 mm
- Primary through-hole of current transducer hole Ø 16
- Current transformer output cable length: 1 m
- Module fixing DIN rail rear box or
- Module fastening 2 slots Ø 4.2 mm
2 M4 steel nuts
- Recommended fastening torque 2.8 Nm
- Voltage terminal block 4 M3
- Recommended fastening torque 0.5 Nm
- Input voltage terminal use cable max cross section 2.5 mm²

Remarks

- Temperature of the primary conductor should not exceed 65°C.
- EMN module must be installed vertically as shown on the diagram above.