


## Voltage Transducer LV 100-2000/SP6

For the electronic measurement of voltage: DC, AC, pulsed..., with galvanic isolation between the primary circuit and the secondary circuit.



$$V_{PN} = 2000 \text{ V}$$



### Electrical data

$V_{PN}$	Primary nominal voltage rms	2000	V				
$V_{PM}$	Primary voltage, measuring range	0 .. $\pm 3000$	V				
$I_{PN}$	Primary nominal current rms	5	mA				
$R_M$	Measuring resistance	$R_{M \min}$	$R_{M \max}$				
					with $\pm 15 \text{ V}$	@ $\pm 1000 \text{ V}_{\max}$	0
			@ $\pm 2000 \text{ V}_{\max}$		0	210	$\Omega$
			@ $\pm 3000 \text{ V}_{\max}$		0	120	$\Omega$
		with $\pm 24 \text{ V}$	@ $\pm 1000 \text{ V}_{\max}$		0	770	$\Omega$
			@ $\pm 2000 \text{ V}_{\max}$		0	410	$\Omega$
	@ $\pm 3000 \text{ V}_{\max}$	110	250	$\Omega$			
$I_{SN}$	Secondary nominal current rms	50	mA				
$K_N$	Conversion ratio	2000 V / 50	mA				
$V_C$	Supply voltage ( $\pm 10 \%$ )	$\pm 15 \dots 24$	V				
$I_C$	Current consumption	$< 37 + I_S$	mA				

### Accuracy - Dynamic performance data

$X_G$	Overall accuracy @ $V_{PN}, T_A = 25^\circ\text{C}$	$\pm 0.9$	%		
$\epsilon_L$	Linearity error	$< 0.1$	%		
$I_O$	Offset current @ $I_P = 0, T_A = 25^\circ\text{C}$	Typ	Max		
			$\pm 0.2$	mA	
$I_{OT}$	Temperature variation of $I_O$	- $25^\circ\text{C} \dots + 70^\circ\text{C}$	$\pm 0.4$	$\pm 0.6$	mA
		- $40^\circ\text{C} \dots + 85^\circ\text{C}$		$\pm 1.0$	mA
$t_r$	Response time to 90 % of $V_{PN}$ step	70	$\mu\text{s}$		

### General data

$T_A$	Ambient operating temperature	- 40 .. + 85	$^\circ\text{C}$	
$T_S$	Ambient storage temperature	- 45 .. + 90	$^\circ\text{C}$	
$N$	Turns ratio	20000 : 2000		
$P$	Total primary power loss	10	W	
$R_1$	Primary resistance	@ $T_A = 25^\circ\text{C}$	400	k $\Omega$
$R_S$	Secondary coil resistance	@ $T_A = 85^\circ\text{C}$	57	$\Omega$
$m$	Mass		790	g
	Standards		EN 50155: 1995	

### Features

- Closed loop (compensated) voltage transducer using the Hall effect
- Isolated plastic case recognized according to UL 94-V0
- Primary resistor  $R_1$  incorporated into the housing.

### Special features

- $V_C = \pm 15 \dots 24$  ( $\pm 10\%$ ) V
- $V_d = 12 \text{ kV}$
- $T_A = - 40^\circ\text{C} \dots + 85^\circ\text{C}$
- Shield between primary and secondary
- Connection to secondary circuit on M5 threaded studs
- DTR N°0000122104.

### Advantages

- Excellent accuracy
- Very good linearity
- Low thermal drift
- High immunity to external interference.

### Applications

- Single or three phase inverter
- Propulsion and braking chopper
- Propulsion converter
- Auxiliary converter
- Battery charger.

### Application Domain

- Traction.

## Voltage Transducer LV 100-2000/SP6

### Isolation characteristic

$V_d$	Rms voltage for AC isolation test, 50 Hz, 1 min	12 <sup>1)</sup>	kV
		1 <sup>2)</sup>	kV
		Min	
<b>dCp</b>	Creepage distance	164.8	mm
<b>dCl</b>	Clearance	47.1	mm
<b>CTI</b>	Comparative Tracking Index (group I)	600	

**Notes:** <sup>1)</sup> Between primary and secondary + shield + heat sink

<sup>2)</sup> Between secondary and shield.

### Safety



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply).


Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a build-in device, whose conducting parts must be inaccessible after installation.


A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

## Dimensions LV 100-2000/SP6 (in mm)

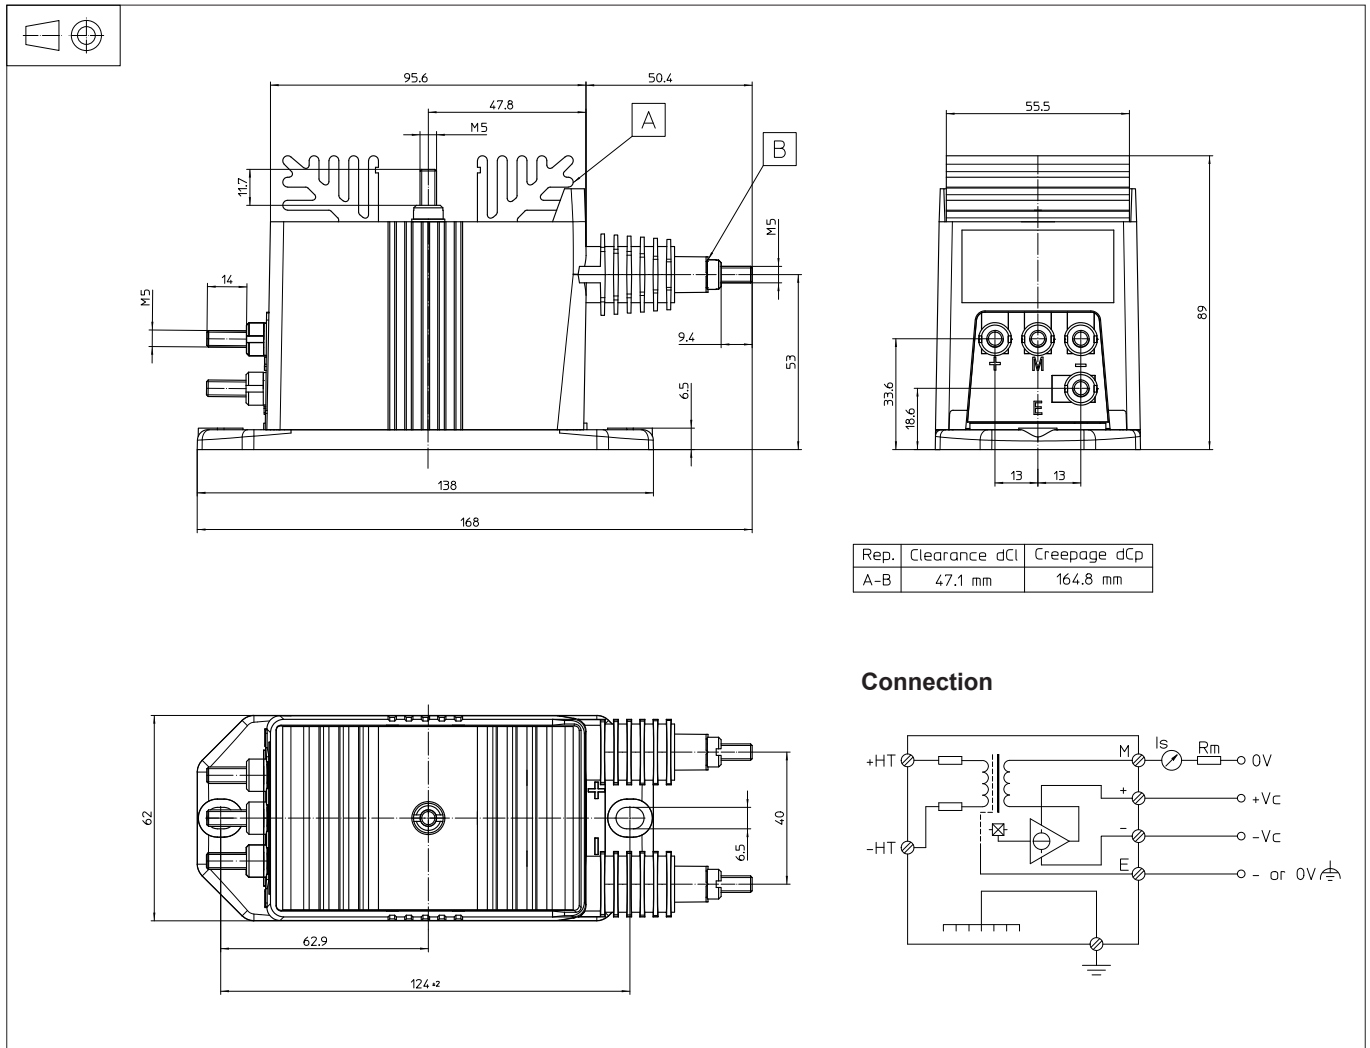

### Connection

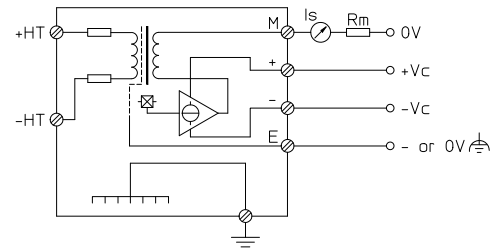

### Mechanical characteristics

- General tolerance  $\pm 0.3$  mm
- Transducer fastening  $2$  holes  $\varnothing 6.5$  mm  
 $2 \times$  M6 steel screws  
Recommended fastening torque 5 Nm
- Connection of primary 2 M5 threaded studs
- Connection of secondary 4 M5 threaded studs
- Connection to the ground M5 threaded stud  
Recommended fastening torque 2.2 Nm

### Remarks

- $I_s$  is positive when  $V_p$  is applied on terminal + HT.
- The primary circuit of the transducer must be linked to the connections where the voltage has to be measured.