

Integrated Current Sensor GXN AFE (Version A) Industrial Only

I_{PM} From 10 to 100 A

Description

The GXN AFE Series by LEM is a high-performance, integrated current sensor designed for precise AC and DC current measurement in industrial applications. It features wide bandwidth and low response time, better accommodating high-efficiency power devices such as SiC and GaN. Featuring advanced ambient field rejection and a temperature compensation algorithm, the GXN AFE Series delivers reliable accuracy across a wide temperature range. Its low-resistance primary conductor (0.85 mΩ typical) ensures minimal power loss, supporting efficient system operation. The GXN AFE Series supports current measurement from 10 to 100 A, with robust insulation and surge protection for demanding applications. Galvanic isolation between primary and secondary sides eliminates the need for any additional insulation, reducing the total footprint and the cost of the system.

Note on Version A – Industrial Grade Only

Version A of the GXN AFE Series is dedicated exclusively to industrial application. For AEC-Q100 qualification Grade 0 and specifications tailored to automotive sector requirements, Version Q applies.

Key Features & Advantages


- Bandwidth: 1 MHz (with -3 dB)
- Response Time: 300 ns
- Current Range: 10 to 100 A (multi-range)
- Primary Resistance: 0.85 mΩ (minimizing heat loss)
- Surge Current Capability: Up to 13 kA (IEC 61000-4-5), industry-leading for industrial environments
- Galvanic Isolation: 5000 Vrms, 8 mm clearance and creepage distances
- Dual Supply Voltage: 3.3 V or 5 V for design flexibility
- Working Voltage: 1550Vdc / 1097Vrms (for basic isolation)
- Maximum Surge Isolation Withstand Voltage: 10 kV
- Integrated Overcurrent Detection: Internal and external OCD circuits for fast and reliable protection
- Operating Temperature: -40°C to +150°C
- Compact SOIC16L Package: Optimized for PCB space
- Safety Certification: UL62368/EN62368
- ROHS & REACH Compliance

Product MOQ

GXN-XXX: 1000 pcs/Reel.

Applications

- Photovoltaic System and Inverters
- Drives and Motor Control
- Industrial Power Supply
- OBC/DCDC/PTC Heater
- Charging Pile
- Power Distribution
- UPS
- HVAC Inverters
- Appliances

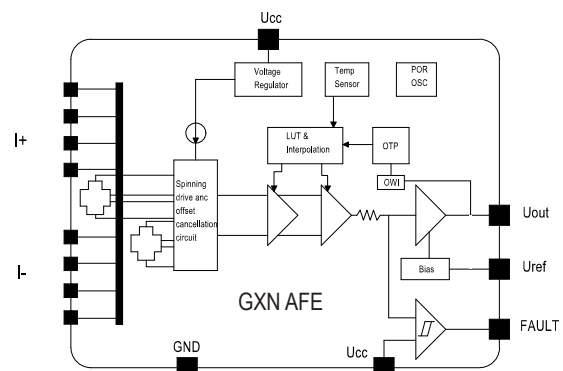

Main Order Information (Recommended the following device)

Part Number	Full Scale Primary Current (A)	Nominal Current (A)	Power Supply (V)	Sensitivity (mV/A)	Package
GXN AFE 50-50010A	50	20	5	40	SOIC 16L
GXN AFE 65-50010A	65	26	5	30.77	
GXN AFE 66-30010A	66	26	3.3	20	
GXN AFE 80-50010A	80	32	5	30.77	
GXN AFE 100-30010A	100	40	3.3	13.2	
GXN AFE 100-50010A	100	40	5	20	

For more information about LEM stock and lead time, please contact us: <https://www.lem.com/en/form/contact-us>

Product Naming Rules

GXN
AFE
50
–
5
0
0
1
0
A

- | | |
|---|---|
| <p>0 Integrated Current Sensor</p> <p>1 ASIC Version</p> <p>2 Full Scale Current (A)</p> <p>3 Supply Voltage:
5 – VCC = 5 V; 3 – VCC = 3.3 V</p> <p>4 Output Directionality:
0 – Bipolar output; 1 – Unipolar output</p> | <p>5 Output mode:
0 – Fixed mode output; 1 – Ratiometric mode output</p> <p>6 Trimming code</p> <p>7 Operating Temperature Range:
0 – -40~150°C; 1 – -40~125°C</p> <p>8 Product Grade: A for Industrial, Q for Automotive</p> |
|---|---|

Pin Definitions

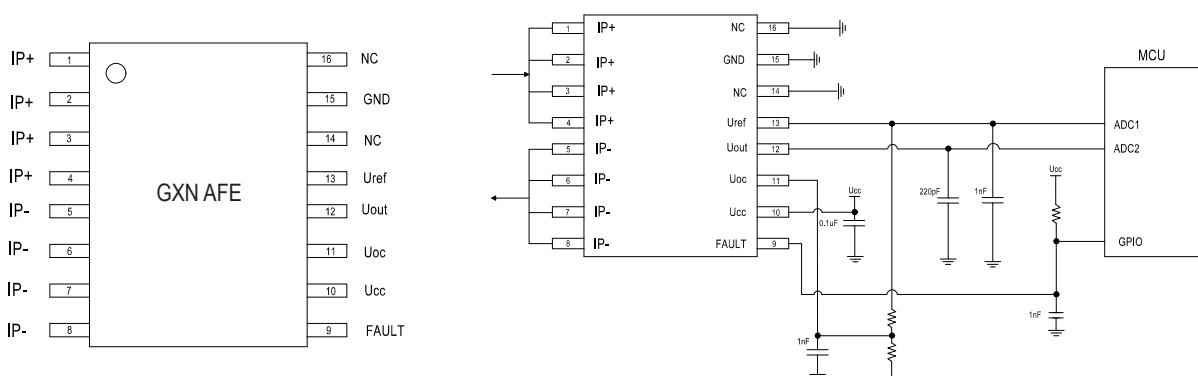


Figure 1: Pin definitions and application circuit

Pin Number	Name	Function
1–4	I_p^+	Input of the primary current
5–8	I_p^-	Output of the primary current
9	FAULT	Over Current Detection
10	U_c	Supply voltage
11	U_{oc}	Set the output overcurrent protection point
12	U_{out}	Output voltage
13	U_{ref}	Reference voltage
14	NC	Not connected
15	GND	Ground
16	NC	Not connected

Absolute maximum ratings

Parameter	Symbol	Unit	Value
Maximum supply voltage @ 25°C	$U_{C\max}$	V	6.5
Maximum junction temperature ¹⁾	$T_{J\max}$	°C	165
Electrostatic discharge voltage (HBM - Human Body Model)	$U_{ESD\ HBM}$	kV	8
Electrostatic discharge voltage (CDM - Charged Device Model)	$U_{ESD\ CDM}$	kV	2
Source sink max current		mA	±25

Note: Absolute maximum ratings apply at 25°C unless otherwise noted.

Stresses above these ratings may cause permanent damage.

Exposure to absolute maximum ratings for extended periods may degrade reliability.

Environmental and mechanical characteristics

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Ambient operating temperature	T_A	°C	-40		150	
Ambient storage temperature	$T_{A\ st}$	°C	-40		165	
Resistance of the primary @ $T_A = 25^\circ\text{C}$	R_p	mΩ		0.85		

Insulation coordination

Parameter	Symbol	Unit	Value	Comment
RMS voltage for AC insulation test, 50 Hz, 1 min	U_d	V _{rms}	5000	According to UL 62368-1
Impulse withstand voltage 1.2/50 μs	U_{Ni}	kV	10	According to IEC 61000-4-5
Surge current	I_{Surge}	kA	13	According to IEC 61000-4-5
Clearance (pri. - sec.)	d_{CI}	mm	8	Shortest distance through air
Creepage distance (pri. - sec.)	d_{CP}	mm	8	Shortest path along device body
Comparative tracking index	CTI		≥600	$CTI\ I$
Common-mode transient immunity	$CMTI$	V/ns	>100	The criterion for judging the failure is that the output peak is greater than 100 mV and the duration is longer than 1 μs
Application example System voltage RMS		V _{rms}	1097	Basic insulation according to UL 60950-1 and UL 62368-1
Application example System voltage DC		V _{dc}	1550	Basic insulation according to UL 60950-1 and UL 62368-1

Note: ¹⁾ Done on LEM evaluation board PCB.

GXN Common Characteristics ($T_A = -40^\circ\text{C} \dots 150^\circ\text{C}$, $U_C = 5\text{ V}$ or 3.3 V , unless otherwise noted)

Parameter	Symbol	Unit	Min	Typ	Max	Comment
DC supply voltage	U_C	V	3	3.3	3.6	$U_C = 3.3\text{ V}$
			4.5	5	5.5	$U_C = 5\text{ V}$
DC current consumption	I_C	mA		25		No load, $U_C = 5\text{ V}$, $T_A = 25^\circ\text{C}$
				21		No load, $U_C = 3.3\text{ V}$, $T_A = 25^\circ\text{C}$
Internal reference voltage @ $I_P = 0\text{ A}$	$U_{I\text{ref}}$	V		2.5		$U_C = 5\text{ V}$, Bipolar&Fixed version, $T_A = 25^\circ\text{C}$
				1.65		$U_C = 3.3\text{ V}$, Bipolar&Fixed version, $T_A = 25^\circ\text{C}$
				0.5		$U_C = 5\text{ V}$, Unipolar&Fixed version, $T_A = 25^\circ\text{C}$
				0.33		$U_C = 3.3\text{ V}$, Unipolar&Fixed version, $T_A = 25^\circ\text{C}$
Load capacitance ¹⁾	C_L	nF			10	Applicable to U_{out} and U_{ref} pins
Load resistance ¹⁾	R_L	k Ω	10			Applicable to U_{out} and U_{ref} pins
Primary conductor resistance	R_P	m Ω		0.85		$T_A = 25^\circ\text{C}$
Power On Time	t_{PO}	ms		1		$T_A = 25^\circ\text{C}$, before OTP is loading
Linearity error $0 \dots \pm I_{\text{PM}}$	ε_L	%		± 0.2		Linearity error $0 \dots \pm I_{\text{PM}}$
Output voltage range @ I_{PM}	$U_{\text{out}} - U_{\text{ref}}$	V	0.1		$U_C - 0.1$	$T_A = 25^\circ\text{C}$, $C_L = 220\text{ pF}$, $R_L = 10\text{ k}\Omega$, to U_C or GND
Common mode field rejection ¹⁾	$CMFR$	dB		>40		
Frequency bandwidth ($\sim 3\text{ dB}$)	BW	MHz		1		$T_A = 25^\circ\text{C}$, $U_C = 5\text{ V}$, $C_L = 220\text{ pF}$
Noise density	N_d	uArms/ $\sqrt{\text{Hz}}$		260		$T_A = 25^\circ\text{C}$, $U_C = 5\text{ V}$, $C_L = 220\text{ pF}$
				400		$T_A = 25^\circ\text{C}$, $U_C = 3.3\text{ V}$, $C_L = 220\text{ pF}$
Internal OCD threshold error	$\varepsilon_{I\text{OCD Th}}$	%		± 5		Referred to I_{PM} , $T_A = 25^\circ\text{C}$, $C_L = 220\text{ pF}$
OCD output on resistance	$R_{\text{on I OCD}}$	k Ω	4.7		100	
Rise time	t_{rise}	μs		1		$T_A = 25^\circ\text{C}$, $C_L = 220\text{ pF}$, $U_C = 5\text{ V}$ 1 MHz Version
Delay time	t_D	ns		300		$T_A = 25^\circ\text{C}$, $C_L = 220\text{ pF}$, $U_C = 5\text{ V}$ 1 MHz Version
OCD delay time	$t_{D\text{ I OCD}}$	ns		700		$T_A = 25^\circ\text{C}$, $C_L = 220\text{ pF}$, $U_C = 5\text{ V}$

Note: ¹⁾ Guaranteed by design.

Electrical data GXN AFE 50-50010A, (At $T_A = -40^\circ\text{C} \dots 150^\circ\text{C}$, $U_C = 5\text{ V}$, unless otherwise noted)

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal current	I_{PN}	A		20		
Primary current, measuring range	I_{PM}	A	-50		50	
Internal reference voltage @ $I_p = 0\text{ A}$	U_{Iref}	V		2.5		
Nominal sensitivity	S_N	mV/A		40		
Sensitivity error ¹⁾	ϵ_S	%	-1.5		1.5	$T_A = 25^\circ\text{C} \dots 150^\circ\text{C}$
				± 2.5		$T_A = -40^\circ\text{C} \dots 25^\circ\text{C}$
Sum of sensitivity and linearity error @ $T_A = 25^\circ\text{C}$	ϵ_{SL25}	% of I_{PN}	/	2	/	
Electrical offset voltage	U_{OE}	mV	-8		8	$U_{out} - U_{Iref} @ U_{Iref} = 2.5\text{ V}$ $T_A = 25^\circ\text{C} \dots 150^\circ\text{C}$
				± 10		$U_{out} - U_{Iref} @ U_{Iref} = 2.5\text{ V}$ $T_A = -40^\circ\text{C} \dots 25^\circ\text{C}$
Total output error ¹⁾	E_{total}	% of I_{PN}	-1.5		1.5	$T_A = 25^\circ\text{C} \dots 150^\circ\text{C}$
				± 2.5		$T_A = -40^\circ\text{C} \dots 25^\circ\text{C}$
Offset lifetime drift	U_{OE_drif}	mV		± 8		$T_A = 25^\circ\text{C}$
Sensitivity error lifetime drift	E_{S_drift}	%		± 2.1		$T_A = 25^\circ\text{C}$
Total output error over lifetime drift	E_{total_drift}	%		± 2.3		$T_A = 25^\circ\text{C}$

Note: ¹⁾ In production, total output error and sensitivity error are measured and calculated at 40 A. A single part will not have both the maximum/minimum sensitivity error and maximum/minimum offset voltage. Min/Max value is the mean value $\pm 3\sigma$; according to the statistical law, 99.73% of the data is in this range Inside.

Electrical data GXN AFE 65-50010A, (At $T_A = -40^\circ\text{C} \dots 150^\circ\text{C}$, $U_C = 5\text{ V}$, unless otherwise noted)

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal current	I_{PN}	A		26		
Primary current, measuring range	I_{PM}	A	-65		65	
Internal reference voltage @ $I_p = 0\text{ A}$	U_{Iref}	V		2.5		
Nominal sensitivity	S_N	mV/A		30.77		
Sensitivity error ¹⁾	ϵ_S	%	-1.5		1.5	$T_A = 25^\circ\text{C} \dots 150^\circ\text{C}$
				± 2.5		$T_A = -40^\circ\text{C} \dots 25^\circ\text{C}$
Sum of sensitivity and linearity error @ $T_A = 25^\circ\text{C}$	ϵ_{SL25}	% of I_{PN}	/	2	/	
Electrical offset voltage	U_{OE}	mV	-8		8	$U_{out} - U_{Iref} @ U_{Iref} = 2.5\text{ V}$ $T_A = 25^\circ\text{C} \dots 150^\circ\text{C}$
				± 10		$U_{out} - U_{Iref} @ U_{Iref} = 2.5\text{ V}$ $T_A = -40^\circ\text{C} \dots 25^\circ\text{C}$
Total output error ¹⁾	E_{total}	% of I_{PN}	-1.5		1.5	$T_A = 25^\circ\text{C} \dots 150^\circ\text{C}$
				± 2.5		$T_A = -40^\circ\text{C} \dots 25^\circ\text{C}$
Offset lifetime drift	U_{OE_drif}	mV		± 8		$T_A = 25^\circ\text{C}$
Sensitivity error lifetime drift	E_{S_drift}	%		± 2.1		$T_A = 25^\circ\text{C}$
Total output error over lifetime drift	E_{total_drift}	%		± 2.3		$T_A = 25^\circ\text{C}$

Note: ¹⁾ In production, total output error and sensitivity error are measured and calculated at 50 A. A single part will not have both the maximum/minimum sensitivity error and maximum/minimum offset voltage. Min/Max value is the mean value $\pm 3\sigma$; according to the statistical law, 99.73% of the data is in this range Inside.

Electrical data GXN AFE 80-50010A, (At $T_A = -40^\circ\text{C} \dots 150^\circ\text{C}$, $U_C = 5\text{ V}$, unless otherwise noted)

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal current	I_{PN}	A		32		
Primary current, measuring range	I_{PM}	A	-80		80	
Internal reference voltage @ $I_p = 0\text{ A}$	U_{Iref}	V		2.5		
Nominal sensitivity	S_N	mV/A		25		
Sensitivity error ¹⁾	ϵ_S	%	-1.5		1.5	$T_A = 25^\circ\text{C} \dots 150^\circ\text{C}$
				± 2.5		$T_A = -40^\circ\text{C} \dots 25^\circ\text{C}$
Sum of sensitivity and linearity error @ $T_A = 25^\circ\text{C}$	ϵ_{SL25}	% of I_{PN}	/	2	/	
Electrical offset voltage	U_{OE}	mV	-8		8	$U_{out} - U_{Iref} @ U_{Iref} = 2.5\text{ V}$ $T_A = 25^\circ\text{C} \dots 150^\circ\text{C}$
				± 10		$U_{out} - U_{Iref} @ U_{Iref} = 2.5\text{ V}$ $T_A = -40^\circ\text{C} \dots 25^\circ\text{C}$
Total output error ¹⁾	E_{total}	% of I_{PN}	-1.5		1.5	$T_A = 25^\circ\text{C} \dots 150^\circ\text{C}$
				± 2.5		$T_A = -40^\circ\text{C} \dots 25^\circ\text{C}$
Offset lifetime drift	U_{OE_drift}	mV		± 8		$T_A = 25^\circ\text{C}$
Sensitivity error lifetime drift	E_{S_drift}	%		± 2.1		$T_A = 25^\circ\text{C}$
Total output error over lifetime drift	E_{total_drift}	%		± 2.3		$T_A = 25^\circ\text{C}$

Note: ¹⁾ In production, total output error and sensitivity error are measured and calculated at 50 A. A single part will not have both the maximum/minimum sensitivity error and maximum/minimum offset voltage. Min/Max value is the mean value $\pm 3\sigma$; according to the statistical law, 99.73% of the data is in this range Inside.

Electrical data GXN AFE 100-50010A, (At $T_A = -40^\circ\text{C} \dots 150^\circ\text{C}$, $U_C = 5\text{ V}$, unless otherwise noted)

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal current	I_{PN}	A		40		
Primary current, measuring range	I_{PM}	A	-100		100	
Internal reference voltage @ $I_p = 0\text{ A}$	U_{Iref}	V		2.5		
Nominal sensitivity	S_N	mV/A		20		
Sensitivity error ¹⁾	ϵ_S	%	-1.5		1.5	$T_A = 25^\circ\text{C} \dots 150^\circ\text{C}$
				± 2.5		$T_A = -40^\circ\text{C} \dots 25^\circ\text{C}$
Sum of sensitivity and linearity error @ $T_A = 25^\circ\text{C}$	ϵ_{SL25}	% of I_{PN}	/	2	/	
Electrical offset voltage	U_{OE}	mV	-8		8	$U_{out} - U_{Iref} @ U_{Iref} = 2.5\text{ V}$ $T_A = 25^\circ\text{C} \dots 150^\circ\text{C}$
				± 10		$U_{out} - U_{Iref} @ U_{Iref} = 2.5\text{ V}$ $T_A = -40^\circ\text{C} \dots 25^\circ\text{C}$
Total output error ¹⁾	E_{total}	% of I_{PN}	-1.5		1.5	$T_A = 25^\circ\text{C} \dots 150^\circ\text{C}$
				± 2.5		$T_A = -40^\circ\text{C} \dots 25^\circ\text{C}$
Offset lifetime drift	U_{OE_drif}	mV		± 8		$T_A = 25^\circ\text{C}$
Sensitivity error lifetime drift	E_{S_drift}	%		± 2.1		$T_A = 25^\circ\text{C}$
Total output error over lifetime drift	E_{total_drift}	%		± 2.3		$T_A = 25^\circ\text{C}$

Note: ¹⁾ In production, total output error and sensitivity error are measured and calculated at 50 A. A single part will not have both the maximum/minimum sensitivity error and maximum/minimum offset voltage. Min/Max value is the mean value $\pm 3\sigma$; according to the statistical law, 99.73% of the data is in this range Inside.

Electrical data GXN AFE 66-30010A, (At $T_A = -40^\circ\text{C} \dots 150^\circ\text{C}$, $U_C = 3.3\text{ V}$, unless otherwise noted)

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal current	I_{PN}	A		26		
Primary current, measuring range	I_{PM}	A	-66		66	
Internal reference voltage @ $I_p = 0\text{ A}$	U_{Iref}	V		1.65		
Nominal sensitivity	S_N	mV/A		20		
Sensitivity error ¹⁾	ϵ_S	%	-1.5		1.5	$T_A = 25^\circ\text{C} \dots 150^\circ\text{C}$
				± 2.5		$T_A = -40^\circ\text{C} \dots 25^\circ\text{C}$
Sum of sensitivity and linearity error @ $T_A = 25^\circ\text{C}$	ϵ_{SL25}	% of I_{PN}	/	2	/	
Electrical offset voltage	U_{OE}	mV	-8		8	$U_{out} - U_{Iref} @ U_{Iref} = 1.65\text{ V}$ $T_A = 25^\circ\text{C} \dots 150^\circ\text{C}$
				± 10		$U_{out} - U_{Iref} @ U_{Iref} = 1.65\text{ V}$ $T_A = -40^\circ\text{C} \dots 25^\circ\text{C}$
Total output error ¹⁾	E_{total}	% of I_{PN}	-1.5		1.5	$T_A = 25^\circ\text{C} \dots 150^\circ\text{C}$
				± 2.5		$T_A = -40^\circ\text{C} \dots 25^\circ\text{C}$
Offset lifetime drift	U_{OE_drif}	mV		± 8		$T_A = 25^\circ\text{C}$
Sensitivity error lifetime drift	E_{S_drift}	%		± 2.1		$T_A = 25^\circ\text{C}$
Total output error over lifetime drift	E_{total_drift}	%		± 2.3		$T_A = 25^\circ\text{C}$

Note: ¹⁾ In production, total output error and sensitivity error are measured and calculated at 50 A. A single part will not have both the maximum/minimum sensitivity error and maximum/minimum offset voltage. Min/Max value is the mean value $\pm 3\sigma$; according to the statistical law, 99.73% of the data is in this range Inside.

Electrical data GXN AFE 100-30010A, (At $T_A = -40^\circ\text{C} \dots 150^\circ\text{C}$, $U_C = 3.3\text{ V}$, unless otherwise noted)

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal current	I_{PN}	A		40		
Primary current, measuring range	I_{PM}	A	-100		100	
Internal reference voltage @ $I_p = 0\text{ A}$	U_{Iref}	V		1.65		
Nominal sensitivity	S_N	mV/A		13.2		
Sensitivity error ¹⁾	ϵ_S	%	-1.5		1.5	$T_A = 25^\circ\text{C} \dots 150^\circ\text{C}$
				± 2.5		$T_A = -40^\circ\text{C} \dots 25^\circ\text{C}$
Sum of sensitivity and linearity error @ $T_A = 25^\circ\text{C}$	ϵ_{SL25}	% of I_{PN}	/	2	/	
Electrical offset voltage	U_{OE}	mV	-8		8	$U_{out} - U_{Iref} @ U_{Iref} = 1.65\text{ V}$ $T_A = 25^\circ\text{C} \dots 150^\circ\text{C}$
				± 10		$U_{out} - U_{Iref} @ U_{Iref} = 1.65\text{ V}$ $T_A = -40^\circ\text{C} \dots 25^\circ\text{C}$
Total output error ¹⁾	E_{total}	% of I_{PN}	-1.5		1.5	$T_A = 25^\circ\text{C} \dots 150^\circ\text{C}$
				± 2.5		$T_A = -40^\circ\text{C} \dots 25^\circ\text{C}$
Offset lifetime drift	U_{OE_drift}	mV		± 8		$T_A = 25^\circ\text{C}$
Sensitivity error lifetime drift	E_{S_drift}	%		± 2.1		$T_A = 25^\circ\text{C}$
Total output error over lifetime drift	E_{total_drift}	%		± 2.3		$T_A = 25^\circ\text{C}$

Note: ¹⁾ In production, total output error and sensitivity error are measured and calculated at 50 A. A single part will not have both the maximum/minimum sensitivity error and maximum/minimum offset voltage. Min/Max value is the mean value $\pm 3\sigma$; according to the statistical law, 99.73% of the data is in this range Inside.

Definition of typical, minimum and maximum values

Minimum and maximum values for specified limiting and safety conditions have to be understood as such as well as values shown in "typical" graphs.

On the other hand, measured values are part of a statistical distribution that can be specified by an interval with upper and lower limits and a probability for measured values to lie within this interval.

Unless otherwise stated (e.g. "100%, tested"), the LEM definition for such intervals designated with "min" and "max" is that the probability for values of samples to lie in this interval is 99.73%.

For a normal (Gaussian) distribution, this corresponds to an interval between -3σ and $+3\sigma$. If "typical" values are not obviously mean or average values, those values are defined to delimit intervals with a probability of 68.27%, corresponding to an interval between $-\sigma$ and $+\sigma$ for a normal distribution.

Typical, maximal and minimal values are determined during the initial characterization of the product.

Overcurrent Detection (OCD)

Overcurrent detection is a feature included on GXN AFE product in order to detect high peaks of currents happening during operation. When the primary current exceeds the overcurrent threshold, the internal error comparator reverses, driving Open Drain Output to work, and the Fault pin is pulled down. The overcurrent threshold can be set by using Voc voltage through the external resistance on the Voc pin. This voltage can be set from the Vref source. The effective input voltage of Voc is between 0.33 V and 2 V. The corresponding relationship between the overcurrent threshold and Voc voltage is shown in the following table.

$U_{oc} (U_{cc} = 3.3 \text{ V}) \text{ (V)}$	$U_{oc} (U_{cc} = 5 \text{ V}) \text{ (V)}$	Bipolar Version	Unipolar Version
0.33~0.495	0.5~0.75	75%	75%
0.495~0.661	0.75~1	100%	100%
0.661~0.826	1~1.25	125%	125%
0.826~0.991	1.25~1.5	150%	150%
0.991~1.156	1.5~1.75	175%	175%
1.156~1.32	1.75~2	175%	175%

Overcurrent Detection is triggered when the primary current (positive or negative current) exceeds the overcurrent threshold set. Fault is cleared when the absolute value of the primary current is less than the current threshold set minus current hysteresis. Tfr is Fault Response time: the time from the primary current meets the overcurrent condition to Fault pin is pulled down. The timing of overcurrent protection is as follows:


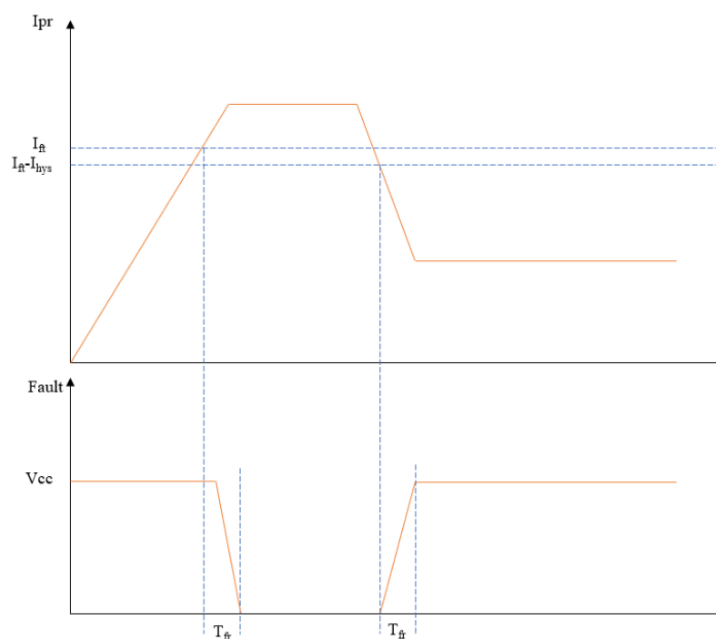


Figure 2: Overcurrent Performance

Performance parameters definition

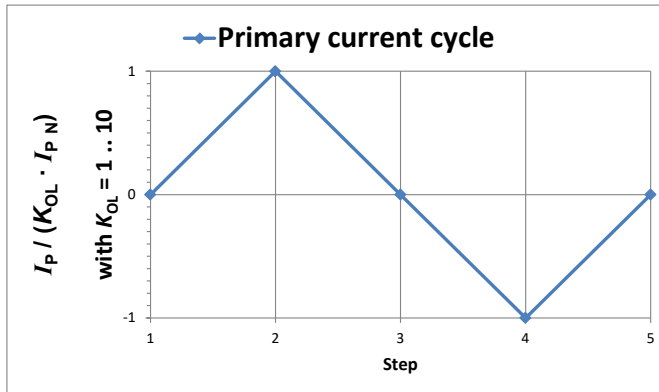

K_{OL} : Overload factor

Figure 1: Current cycle used to measure electrical offset (transducer supplied)

Electrical offset referred to primary

Using the current cycle shown in figure 1, the electrical offset voltage U_{OE} is the residual output referred to primary when the input current is zero.

$$U_{OE} = \frac{U_{P(3)} + U_{P(5)}}{2}$$

The temperature variation U_{OT} of the electrical offset voltage U_{OE} is the variation of the electrical offset from 25°C to the considered temperature.

$$U_{OT}(T) = U_{OE}(T) - U_{OE}(25^{\circ}\text{C})$$

Delay times

The delay time t_{D10} @ 10% and the delay time t_{D90} @ 90% with respect to the primary are shown in the next figure.

Both slightly depend on the primary current di/dt . They are measured at nominal current.

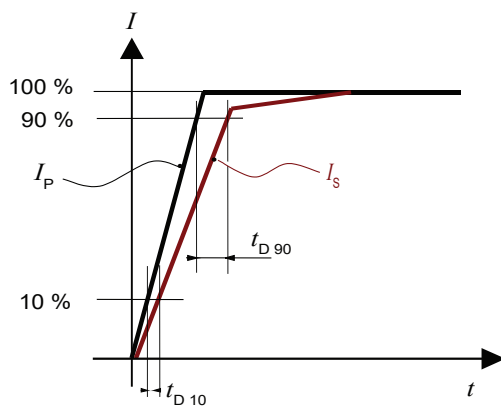


Figure 2: t_{D10} (delay time @ 10%) and t_{D90} (delay time @ 90%)

Total error referred to primary

The total error ε_{tot} is the error at $\pm I_{PN}$, relative to the rated value I_{PN} .

It includes all errors mentioned above

- the electrical offset I_{OE}
- the magnetic offset I_{OM}
- the sensitivity error ε_s
- the linearity error ε_L (to I_{PN}).


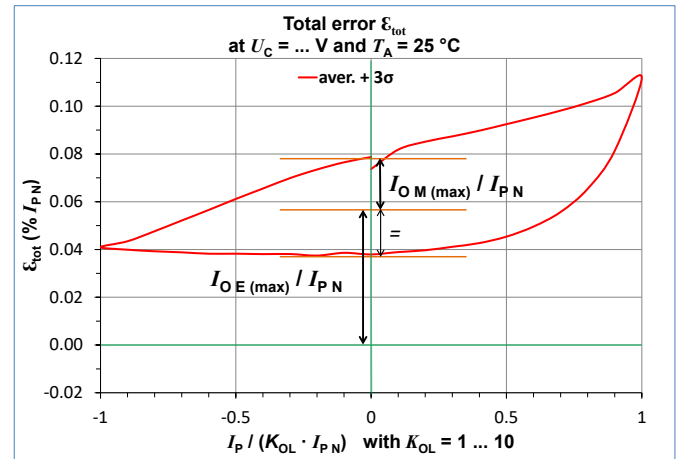


Figure 3: Total error ε_{tot}

Dimensions (in mm)

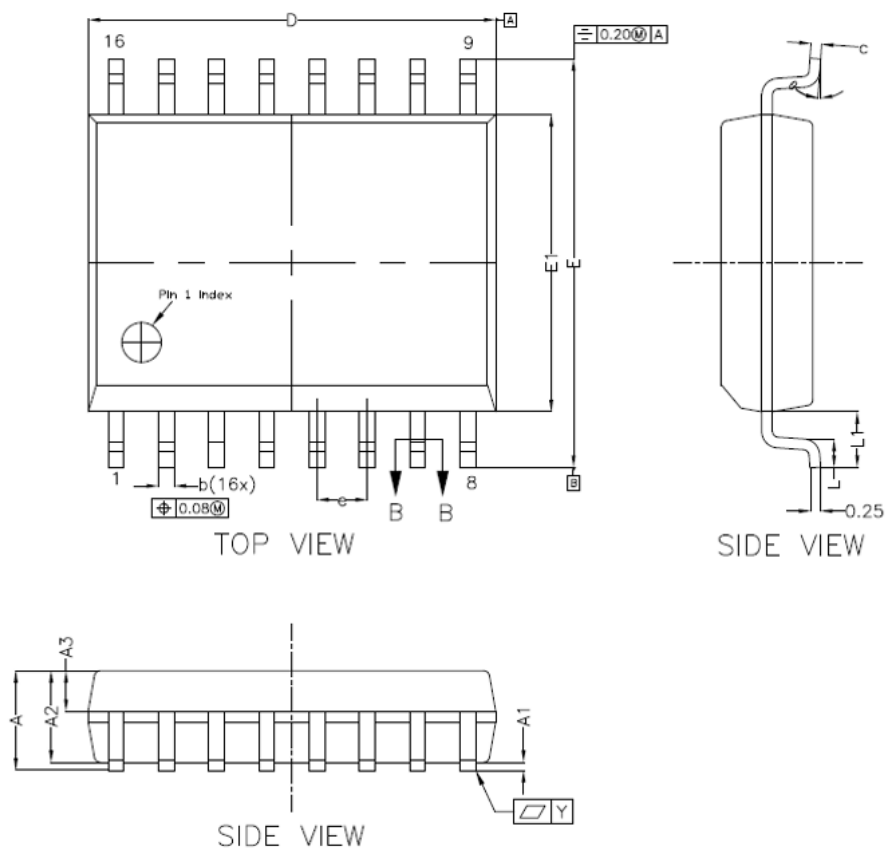



* CONTROLLING DIMENSION : MM

SYMBOL	MILLIMETER		
	MIN.	NOM.	MAX.
A	---	---	2.65
A1	0.10	---	0.30
A2	2.25	2.30	2.35
A3	0.97	1.02	1.07
b	0.35	---	0.43
c	0.23	---	0.32
D	10.20	10.30	10.40
E	10.10	10.30	10.50
E1	7.40	7.50	7.60
e	1.27 bsc		
L1	1.40 bsc		
L	0.55	---	0.85
Y	---	0.10	---
θ	0°	---	8°

NOTES

1.0 COPLANARITY APPLIES TO LEADS, CORNER LEADS AND DIE ATTACH PAD.




Tape and Reel (in mm)

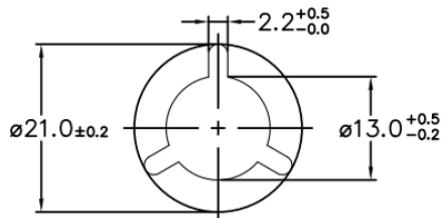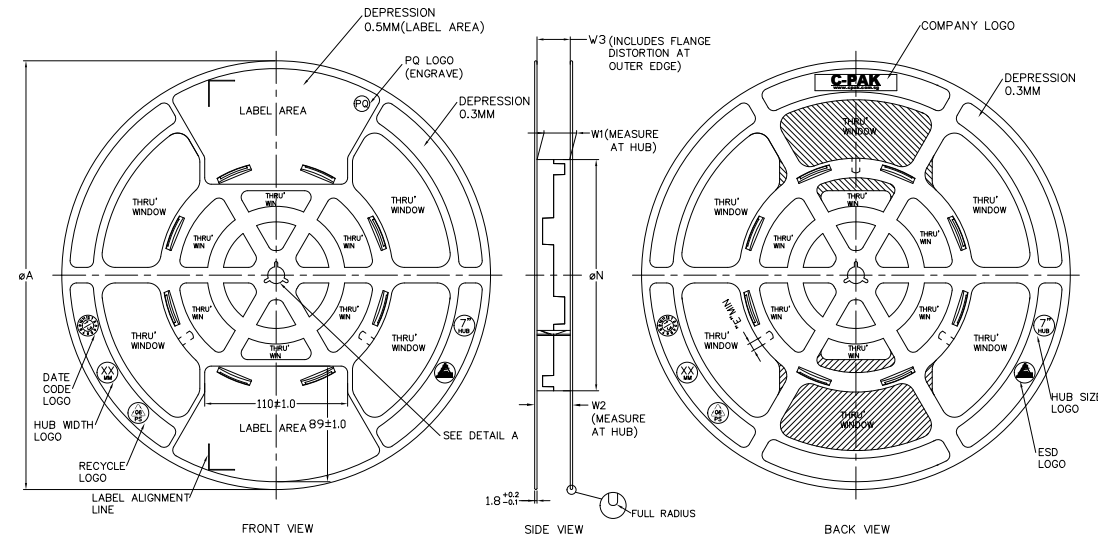

ARBOR HOLE
DETAIL A
SCALE : 3:1

PRODUCT SPECIFICATION						
TAPE WIDTH	$\phi A \pm 2.0$	$\phi N \pm 2.0$	W1	W2 (MAX)	W3	E (MIN)
08MM	330	178	$8.4^{+1.5}_{-0.5}$	14.4	SHALL ACCOMMODATE TAPE WIDTH WITHOUT INTERFERENCE	5.5
12MM	330	178	$12.4^{+3.0}_{-1.0}$	18.4		5.5
16MM	330	178	$16.4^{+3.0}_{-1.0}$	22.4		5.5
24MM	330	178	$24.4^{+3.0}_{-1.0}$	30.4		5.5
32MM	330	178	$32.4^{+3.0}_{-1.0}$	38.4		5.5

SURFACE RESISTIVITY			
LEGEND	SR RANGE	TYPE	COLOUR
A	BELOW 10^{12}	ANTISTATIC	ALL TYPES
B	10^8 TO 10^{11}	STATIC DISSIPATIVE	BLACK ONLY
C	10^8 & BELOW 10^9	CONDUCTIVE (GENERIC)	BLACK ONLY
E	10^9 TO 10^{11}	ANTISTATIC (COATED)	ALL TYPES

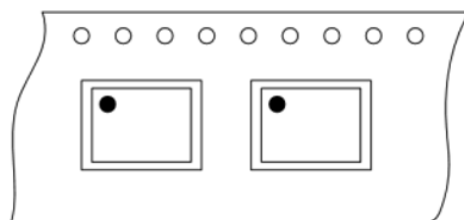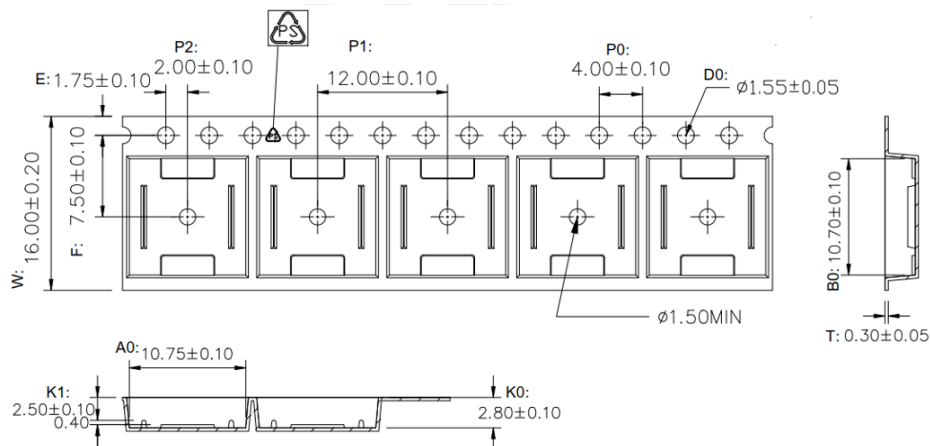

Safety



Caution

If the device is used in a way that is not specified by the manufacturer, the protection provided by the device may be compromised. Always inspect the electronics unit and connecting cable before using this product and do not use it if damaged.

Mounting assembly shall guarantee the maximum primary conductor temperature, fulfill clearance and creepage distance, minimize electric and magnetic coupling, and unless otherwise specified can be mounted in any orientation.



Caution, risk of electrical shock

This transducer must be used in limited-energy secondary circuits SELV according to IEC 61010-1, in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating specifications.

Use caution during installation and use of this product; certain parts of the module can carry hazardous voltages and high currents (e.g. power supply, primary conductor).

Ignoring this warning can lead to injury and or/cause serious damage.

This transducer is a build-in device, whose hazardous live parts must be inaccessible after installation.

This transducer must be mounted in a suitable end-enclosure.

Besides make sure to have a distance of minimum 30 mm between the primary terminals of the transducer and other neighboring components.

This transducer is a built-in device, not intended to be cleaned with any product. Nevertheless if the user must implement cleaning or washing process, validation of the cleaning program has to be done by himself.



ESD susceptibility

The product is susceptible to be damaged from an ESD event and the personnel should be grounded when handling it.

Do not dispose of this product as unsorted municipal waste. Contact a qualified recycler for disposal.

Although LEM applies utmost care to facilitate compliance of end products with applicable regulations during LEM product design, use of this part may need additional measures on the application side for compliance with regulations regarding EMC and protection against electric shock. Therefore LEM cannot be held liable for any potential hazards, damages, injuries or loss of life resulting from the use of this product.



Underwriters Laboratory Inc. recognized component

IMPORTANT NOTICE

The information in this document is considered accurate and reliable. However, LEM International SA and any company directly or indirectly controlled by LEM Holding SA ("LEM") do not provide any guarantee or warranty, expressed or implied, regarding the accuracy or completeness of this information and are not liable for any consequences resulting from its use. LEM shall not be responsible for any indirect, incidental, punitive, special, or consequential damages (including, but not limited to, lost profits, lost savings, business interruption, costs related to the removal or replacement of products, or rework charges) regardless of whether such damages arise from tort (including negligence), warranty, breach of contract, or any other legal theory.

LEM reserves the right to update the information in this document, including specifications and product descriptions, at any time without prior notice. Information in this document replaces any previous versions of this document. No license to any intellectual property is granted by LEM through this document, either explicitly or implicitly. Any Information and product described herein is subject to export control regulations.

LEM products may possess either unidentified or documented vulnerabilities. It is the sole responsibility of the purchaser to design and operate their applications and products in a manner that mitigates the impact of these vulnerabilities. LEM disclaims any liability for such vulnerabilities. Customers must select products with security features that best comply with applicable rules, regulations, and standards for their intended use. The purchaser is responsible for making final design decisions regarding its products and for ensuring compliance with all legal, regulatory, and security-related requirements, irrespective of any information or support provided by LEM.

LEM products are not intended, authorized, or warranted for use in life support, life-critical, or safety-critical systems or equipment, nor in applications where failure or malfunction of an LEM product could result in personal injury, death, or significant property or environmental damage. LEM and its suppliers do not assume liability for the inclusion and/or use of LEM products in such equipment or applications; thus, this inclusion and/or use is at the purchaser's own and sole risk. Unless explicitly stated that a specific LEM product is automotive qualified, it should not be used in automotive applications. LEM does not accept liability for the inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

Applications that are described herein are for illustrative purposes only. LEM makes no representation or warranty that LEM products will be suitable for a particular purpose, a specified use or application. The purchaser is solely responsible for the design and operation of its applications and devices using LEM products, and LEM accepts no liability for any assistance with any application or purchaser product design. It is purchaser's sole responsibility to determine whether the LEM product is suitable and fit for the purchaser's applications and products planned, as well as for the planned application and use of purchaser's third-party customer(s).

Stressing and using LEM products at or above limiting values will cause permanent damage to the LEM product and potentially to any device embedding or operating with LEM product. Limiting values are stress ratings only and operation of the LEM product at or above conditions and limits given in this document is not warranted. Continuous or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the LEM product.

LEM products are sold subject to the general terms and conditions of commercial sale, as published at www.lem.com unless otherwise agreed in a specific written agreement. LEM hereby expressly rejects the purchaser's general terms and conditions for purchasing LEM products by purchaser. Any terms and conditions contained in any document issued by the purchaser either before or after issuance of any document by LEM containing or referring to the general terms and conditions of sale are explicitly rejected and disregarded by LEM, and the document issued by the purchaser is wholly inapplicable to any sale or licensing made by LEM and is not binding in any way on LEM.

© 2026 LEM INTERNATIONAL SA – All rights reserved