


Current Transducer CTSR 0.3-TP/SP14

$I_{PRN} = 300 \text{ mA}$

For the electronic measurement of current: DC, AC, pulsed..., with galvanic separation between the primary circuit and the secondary circuit.

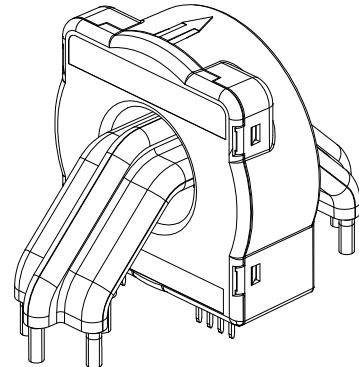

Features

- Closed loop (compensated) current transducer
- Voltage output
- Single supply voltage
- PCB mounting
- Four integrated primary conductors.

Special features

- No retention pin
- Test winding included.

Advantages

- High accuracy
- Very low offset drift over temperature
- High overload capability
- High insulation capability
- Reference pin with two modes, Ref IN and Ref OUT
- Degauss and test functions
- Possibility to add up to four primary wires (diam. 4.2 mm max) in addition to the already integrated primary conductors.

Applications

- Residual current measurement
- Leakage current measurement in transformerless PV inverters
- First human contact protection of PV arrays
- Failure detection in power sources
- Symmetrical fault detection (e.g. after motor inverter)
- Leakage current detection in stacked DC sources
- Single phase or three phase nominal current measurement up to $\pm 30 \text{ A}$ per wire (DC or AC).

Standards

- EN 50178: 1997
- IEC 61010-1: 2010
- UL 508: 2010.

Application Domains

- Industrial
- Suitable to fulfil VDE 0126-1-1, UL 1741 and IEC 62109-2.

Safety



Caution

If the device is used in a way that is not specified by the manufacturer, the protection provided by the device may be compromised. Always inspect the electronics unit and connecting cable before using this product and do not use it if damaged. Mounting assembly shall guarantee the maximum primary conductor temperature, fulfill clearance and creepage distance, minimize electric and magnetic coupling, and unless otherwise specified can be mounted in any orientation.



Caution, risk of electrical shock

This transducer must be used in limited-energy secondary circuits SELV according to IEC 61010-1, in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating specifications.

Use caution during installation and use of this product; certain parts of the module can carry hazardous voltages and high currents (e.g. power supply, primary conductor).

Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a build-in device, whose hazardous live parts must be inaccessible after installation.

This transducer must be mounted in a suitable end-enclosure.

Besides make sure to have a distance of minimum 30 mm between the primary terminals of the transducer and other neighboring components.

This transducer is a built-in device, not intended to be cleaned with any product. Nevertheless if the user must implement cleaning or washing process, validation of the cleaning program has to be done by himself.



ESD susceptibility

The product is susceptible to be damaged from an ESD event and the personnel should be grounded when handling it.

Do not dispose of this product as unsorted municipal waste. Contact a qualified recycler for disposal.

Although LEM applies utmost care to facilitate compliance of end products with applicable regulations during LEM product design, use of this part may need additional measures on the application side for compliance with regulations regarding EMC and protection against electric shock. Therefore LEM cannot be held liable for any potential hazards, damages, injuries or loss of life resulting from the use of this product.



Underwriters Laboratory Inc. recognized component

Absolute maximum ratings

Parameter	Symbol	Unit	Value
Maximum supply voltage	$U_{C\max}$	V	7
Maximum primary conductor temperature	$T_{B\max}$	°C	110
Maximum primary withstand peak current (100 µs, 500 A/µs)	$\hat{I}_{P\max}$	A	3300
RMS voltage for AC insulation test, 50 Hz, 1 min	U_d	V	35
Test current	I_T	mA	300

Stresses above these ratings may cause permanent damage. Exposure to absolute maximum ratings for extended periods may degrade reliability.

UL 508: Ratings and assumptions of certification

File # E189713 Volume: 2 Section: 3

Standards

- CSA C22.2 NO. 14-10 INDUSTRIAL CONTROL EQUIPMENT - Edition 11 - Revision Date 2011/08/01
- UL 508 STANDARD FOR INDUSTRIAL CONTROL EQUIPMENT - Edition 17 - Revision Date 2010/04/15

Ratings

Parameter	Symbol	Unit	Value
Primary involved potential*		V AC/DC	1000
Max surrounding air temperature	T_A	°C	105
Primary current	I_P	A	30
Secondary supply voltage	U_C	V DC	5
Output voltage	U_{out}	V	0 to 5

* Environmental: For use in Pollution degree 3.

Conditions of acceptability

When installed in the end-use equipment, consideration shall be given to the following:

1 - A suitable enclosure shall be provided in the end-use application.

2 - CTSR series is intended to be mounted on the printed wiring board of the end-use equipment.

3 - Primary feeder of the devices shall be connected after an overvoltage device or system which has been evaluated by the Standard for Transient Voltage Surge Suppressors, UL 1449.

4 - Jumpers of current transducers, CTSR X-TP series are intended to be PCB mounted.

Marking

Only those products bearing the UL or UR Mark should be considered to be Listed or Recognized and covered under UL's Follow-Up Service. Always look for the Mark on the product.

Insulation coordination

Parameter	Symbol	Unit	Value	Comment
RMS voltage for AC insulation test, 50 Hz, 1 min	U_d	kV	6	
Impulse withstand voltage 1.2/50 μ s	U_{Ni}	kV	11.2	
Partial discharge RMS test voltage ($q_m < 10$ pC)	U_t	kV	2.475	
Clearance (pri. - pri.)	d_{Cl}	mm	6.7	Shortest distance through air
Creepage distance (pri. - pri.)	d_{Cp}	mm	6.7	Shortest path along device body
Clearance (pri. - sec.)	d_{Cl}	mm	13.5	Shortest distance through air
Creepage distance (pri. - sec.)	d_{Cp}	mm	33.2	Shortest path along device body

When mounted on a PCB (with recommended hole and pad diameters, see paragraph "PCB footprint").

Clearance (pri. - pri.)	d_{Cl}	mm	5.6	Shortest distance through air
Creepage distance (pri. - pri.)	d_{Cp}	mm	5.6	Shortest path along device body
Clearance (pri. - sec.)	d_{Cl}	mm	12.5	Shortest distance through air
Creepage distance (pri. - sec.)	d_{Cp}	mm	12.5	Shortest path along device body
Case material	-	-	V0	According to UL 94
Comparative tracking index	CTI		600	
Application example	-	V	1000	Reinforced insulation, CAT III, PD2 non uniform field according to EN 50178
Application example	-	V	1500	Reinforced insulation, CAT III, PD3 non uniform field according to EN 50178, IEC 61010

Environmental and mechanical characteristics

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Ambient operating temperature	T_A	°C	-40		105	
Ambient storage temperature	$T_{A\text{st}}$	°C	-50		105	
Mass	m	g		55		

At $T_A = 25^\circ\text{C}$, $U_C = +5\text{ V}$, output voltage referred to U_{ref} , unless otherwise noted (see Min., Max., typical definition paragraph) in page 6.

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal residual RMS current	I_{PRN}	mA		300		
Primary residual current, measuring range	I_{PRM}	mA	-500		500	
Supply voltage	U_C	V	4.75	5	5.25	
Current consumption	I_C	mA		17.5	21.6	$+I_p (\text{mA})/N_s$ With $N_s = 1000$ turns $-40 \dots 105^\circ\text{C}$
Output voltage referred to GND (during Degauss cycle)	U_{out}	V		0.3	0.5	¹⁾
Output voltage referred to U_{ref} (Test current)	U_{out}	V	0.001	1.2	1.7	¹⁾
Reference voltage @ $I_p = 0$	U_{ref}	V	2.495	2.5	2.505	Internal reference
External reference voltage	$U_{\text{E ref}}$	V	2.3		4	Internal reference of U_{ref} input = 499Ω ¹⁾
Electrical offset current referred to primary ²⁾	I_{OE}	mA	-24	7	24	
Temperature coefficient of U_{ref}	TCU_{ref}	ppm/K	-50		50	$-40 \dots 105^\circ\text{C}$
Temperature coefficient of U_{OE} @ $I_p = 0$	TCU_{OE}	ppm/K	-570		570	ppm/K of 2.5 V $-40 \dots 105^\circ\text{C}$
Nominal sensitivity	S_N	V/A		4		
Sensitivity error ²⁾	ε_s	%	-1.6	0.5	1.6	$R_L > 500 \text{ k}\Omega$
Sensitivity error with testing winding ($\pm 3\%$)	ε_s	%	-3		3	$R_L > 500 \text{ k}\Omega$
Temperature coefficient of S	TCS	ppm/K	-230 -400		230 400	$-40 \dots 85^\circ\text{C}$ $-40 \dots 105^\circ\text{C}$
Linearity error	ε_L	% of I_{PRM}		0.5	1	
Number of turns (test winding)	N_T			20		
Test current, measuring range	I_{TM}	mA	-25		25	
Magnetic offset current ($1000 \times I_{\text{PRN}}$) referred to primary	I_{OM}	mA		17		
Output RMS noise voltage (1 Hz ... 10 kHz)	U_{no}	mV		6		$R_L > 500 \text{ k}\Omega$
Delay time to 10 % of the final output value I_{PN} step	$t_{D 10}$	μs		7		$R_L > 500 \text{ k}\Omega$, $di/dt > 5 \text{ A}/\mu\text{s}$
Delay time to 90 % of the final output value I_{PN} step	$t_{D 90}$	μs		50		$R_L > 500 \text{ k}\Omega$, $di/dt > 5 \text{ A}/\mu\text{s}$
Frequency bandwidth (-1 dB)	BW	kHz		3.5		$R_L > 500 \text{ k}\Omega$
Error ³⁾	ε	%			1.9	$= (\varepsilon_s^2 + \varepsilon_L^2)^{1/2}$

Notes: ¹⁾ See "Application information" section.

²⁾ Only with a primary nominal residual current, see paragraph "Primary nominal residual current and primary nominal current".

³⁾ Total error @ T_A and I_p : $\varepsilon_{\text{tot}} (T_A) = \left(\varepsilon^2 + \left(\frac{TCS}{10^6} \times 100 \times (T_A - 25) \right)^2 + \left(\frac{TCU_{\text{OE}}}{10^6} \times 2.5 \times (T_A - 25) / S_N \times 100 / I_p \right)^2 \right)^{1/2}$

Definition of typical, minimum and maximum values

Minimum and maximum values for specified limiting and safety conditions have to be understood as such as well as values shown in "typical" graphs. On the other hand, measured values are part of a statistical distribution that can be specified by an interval with upper and lower limits and a probability for measured values to lie within this interval.

Unless otherwise stated (e.g. "100 % tested"), the LEM definition for such intervals designated with "min" and "max" is that the probability for values of samples to lie in this interval is 99.73 %. For a normal (Gaussian) distribution, this corresponds to an interval between -3σ and $+3\sigma$.

If "typical" values are not obviously mean or average values, those values are defined to delimit intervals with a probability of 68.27 %, corresponding to an interval between $-\sigma$ and $+\sigma$ for a normal distribution.

Typical, minimum and maximum values are determined during the initial characterization of a product.

Typical performance characteristics

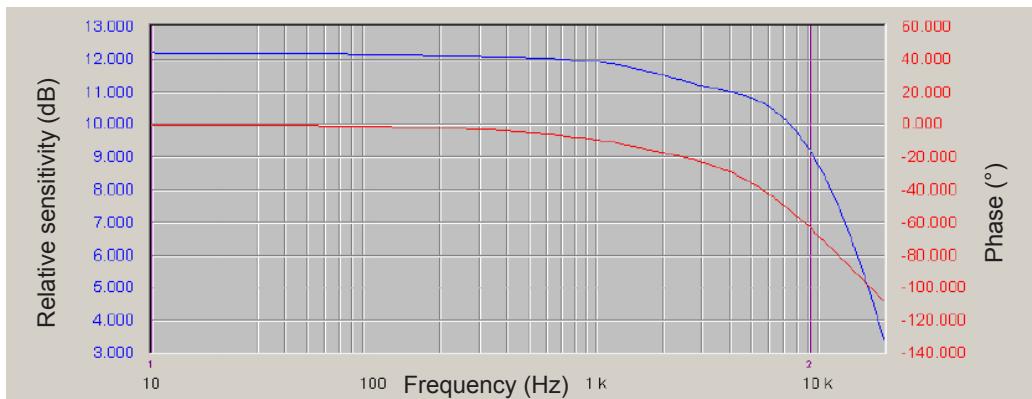


Figure 1: Frequency response

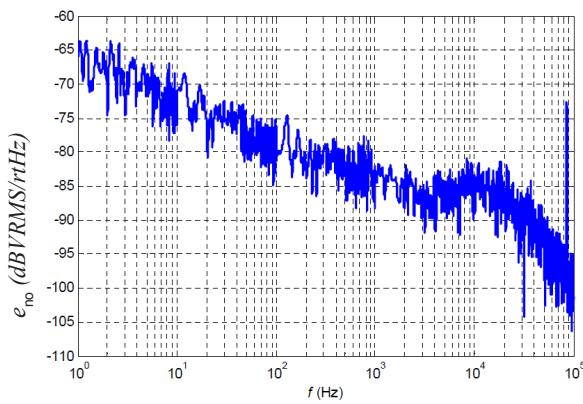


Figure 2: Output noise voltage spectral density

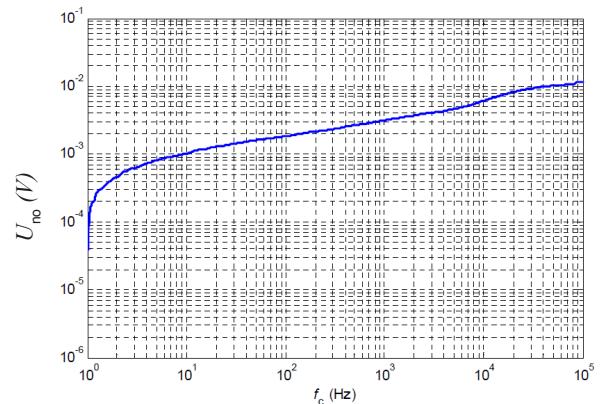


Figure 3: Output noise voltage, cumulated RMS

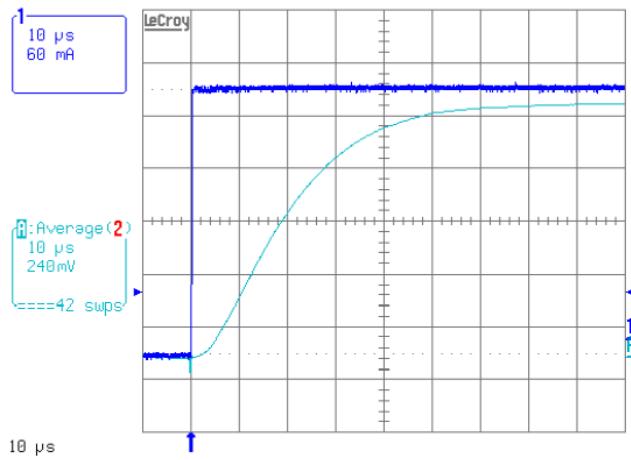


Figure 4: Typical step response

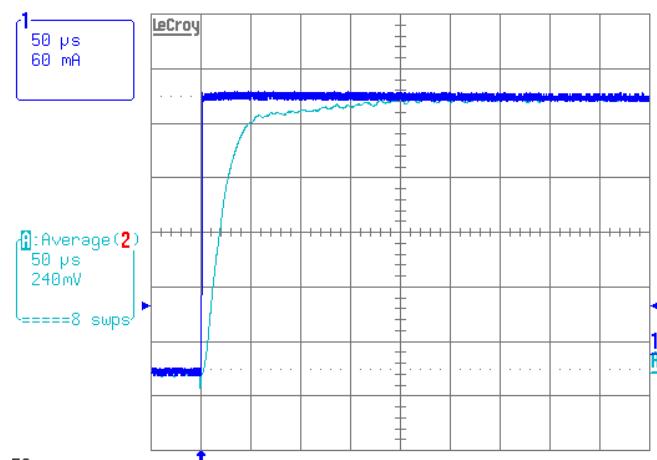


Figure 5: Typical step response

Application information

Filtering, decoupling CTSR transducer

Supply voltage U_c (5 V)

The CTSR transducers have internal decoupling capacitors, but in the case of a power supply track on the application PCB having a high impedance, it is advised to provide local decoupling, 100 nF or more, located close to the transducer.

Reference U_{ref}

Ripple present on the U_{ref} pin can be filtered with a low value of capacitance because of the internal 499 ohm series resistance. The CTSR transducers have an internal capacitor of 22 nF between U_{ref} pin and Gnd pin and the maximum filter capacitance value which could be added is 1 μ F. Adding a larger decoupling capacitor will increase the activation delay of degauss.

Output U_{out}

The CTSR transducers have an internal low pass filter 470 ohm/22 nF; if a decoupling capacitor is added on U_{out} pin, the bandwidth and the response time will be affected. In case of short circuit, the transducer CTSR can source or sink up to a maximum of 10 mA on its output U_{out} .


Using an external reference voltage

If the U_{ref} pin of the transducer is not used it could be either left unconnected or filtered according to the previous paragraph "Reference U_{ref} ".

The U_{ref} pin has two modes Ref out and Ref In:

- In the Ref out mode the 2.5 V internal precision reference is used by the transducer as the reference point for bipolar measurements; this internal reference is connected to the U_{ref} pin of the transducer through a 499 ohms resistor. It tolerates sink or source currents up to ± 5 mA, but the 499 ohms resistor prevents this current to exceed these limits.
- In the Ref In mode, an external reference voltage is connected to the U_{ref} pin; this voltage is specified in the range 2.3 to 4 V and is directly used by the transducer as the reference point for measurements. The external reference voltage U_{ref} must be able:
 - either to source a typical current of $\frac{U_{ref} - 2.5}{499}$, the maximum value will be 3 mA when $U_{ref} = 4$ V.
 - or to sink a typical current of $\frac{2.5 - U_{ref}}{499}$, the maximum value will be 0.4 mA when $U_{ref} = 2.3$ V.

The following graphs show how the measuring range of the transducer depends on the external reference voltage value U_{ref} ($U_c = 5$ V).

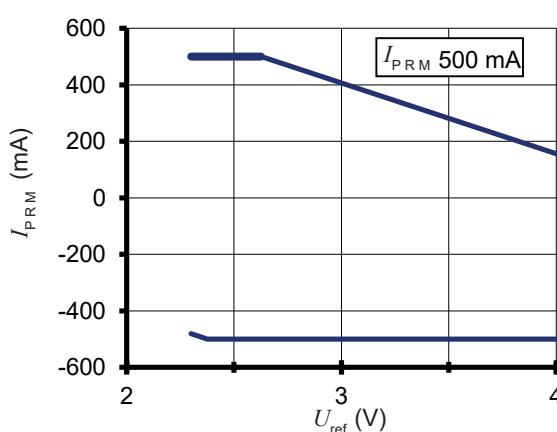

Upper limit: $I_p = 500$ mA	$(U_{ref} = 2.3 \dots 2.625$ V)
Upper limit: $I_p = -250 * U_{ref} + 1156.25$	$(U_{ref} = 2.625 \dots 4$ V)
Lower limit: $I_p = -250 * U_{ref} + 93.75$	$(U_{ref} = 2.3 \dots 2.375$ V)
Lower limit: $I_p = -500$ mA	$(U_{ref} = 2.375 \dots 4$ V)

Primary nominal residual current and primary nominal current

The primary nominal residual current is the sum of the instantaneous values of all currents flowing through the aperture of the transducer. The primary nominal current is the current flowing through any conductor placed into the aperture of the transducer. The presence of a primary nominal current DC or AC leads to an additional uncertainty. For example, with a primary nominal current of 30 A the uncertainty referred to primary is typical 4.3 mA.

Test winding


A test winding is wound around the compensation winding. It allows simulating a primary residual current to test the function of the transducer. The output voltage U_{out} referred to U_{ref} for a test current I_{T} is below.

$$U_{\text{out}} - U_{\text{ref}} = S_{\text{th}} * I_{\text{T}} \text{ (test current) * 20}$$

To fulfill the standard IEC 62109-2 with the transducer, the test winding must be used to verify the accuracy of the transducer according to clause 4.4.4.15.1 and 4.8.3.5 of the IEC 62109-2 before each attempted re-start of the PV inverter. The current injected in the test winding should be generated by a current source. When the test winding is not used, it must stay open. A high voltage may be generated by the test winding when a fast transient primary current is applied to the transducer (transformer effect); an additional protection is recommended in application PCB assembly if there is such a possibility.

Example of Induced voltage: U_{ind} at the test winding

$$I_{\text{P}} = 0 \text{ to } 500 \text{ A at } 5 \mu\text{s} (\text{d}i/\text{d}t = 100 \text{ A}/\mu\text{s})$$

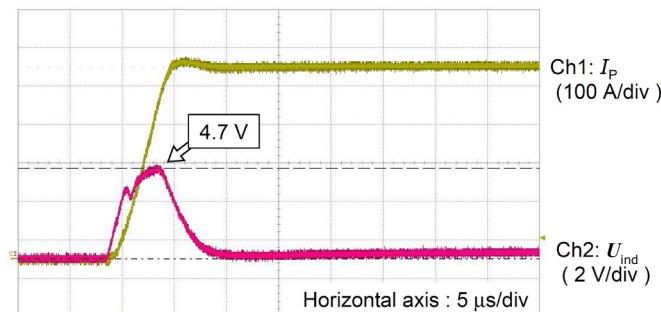

CTSR transducer in Test mode

When the U_{ref} pin is forced at a low level voltage between 0 and 1 V and is maintained at this level, the output voltage U_{out} of CTSR transducer exhibits a fixed value (see specification) as if it measured a primary test current. The activation time of test mode is min 30 ms. The CTSR transducer can be maintained in test mode as long as needed for checking that it is fully operating.

CTSR transducer in Degauss mode


The CTSR transducers go in degauss mode automatically at each power on or on demand by using the U_{ref} pin.

At power on:

A degauss is automatically generated at each power on of the CTSR transducer; during degaussing the output voltage U_{out} is maintained at 0.3 V typ. (max 0.5 V). After c.a. 110 ms, the output voltage U_{out} is released and takes the normal operation level in relation with the measured primary current.


Using U_{ref} pin:

When the pin U_{ref} is released from the Low level voltage defined in the Test mode above, there is a rising edge on U_{ref} which generates an automatic degauss. The activation of degauss takes typically 40 μs after releasing U_{ref} pin, then degauss lasts typically 110 ms.

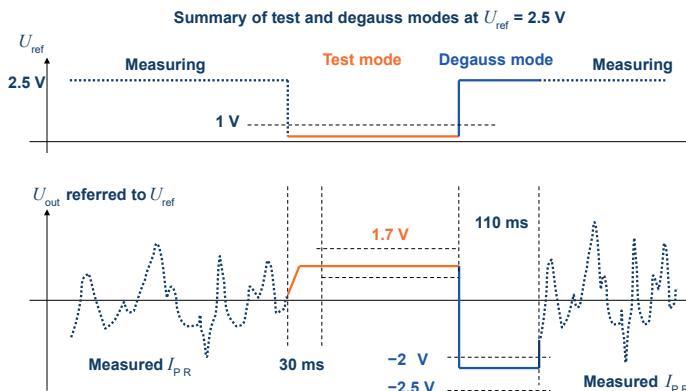


Insulation around the CTSR transducer housing

Due to the joint between the case and the cover of the CTSR transducer, there is some isolation distance to respect when primary conductors pass around the CTSR housing. The figure below shows the joint and the apertures where the clearance between the secondary part inside the CTSR transducer and the surface of the housing is 3 mm (label E).

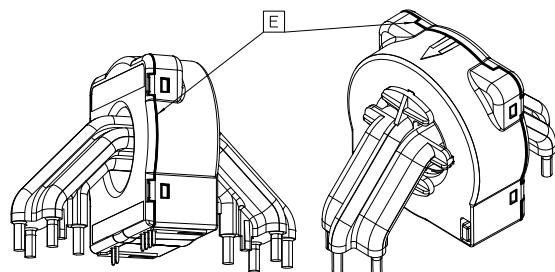

Integrated primary conductors

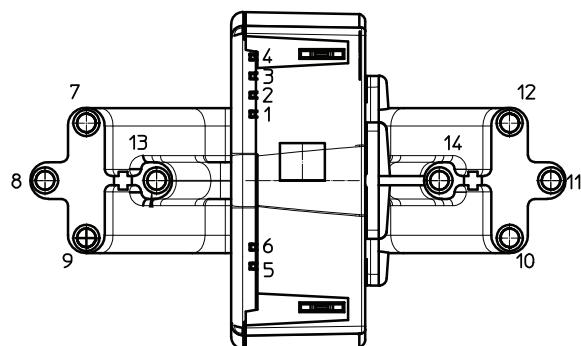


The four integrated primary conductors have a diameter of 2.5 mm. The three conductors 7-12, 8-11 and 9-10 could be used as the lines in a three phase system; the conductor 13-14 could be used either as the neutral in a three phase system or as a test current conductor.

Primary conductor	Typical primary conductor resistance R_p (mOhm)
7-12, 9-10	0.32
8-11	0.36
13-14	0.26

The maximum primary current per conductor must comply with the primary conductor temperature specified in paragraph "Absolute maximum ratings".


PCB footprint

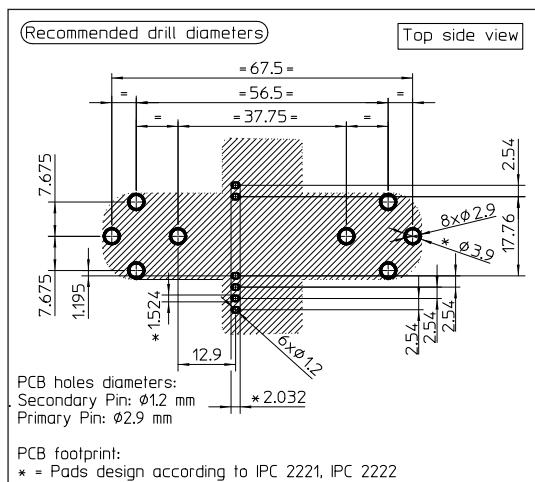

Assembly on PCB

- Recommended PCB hole diameter 1.2 mm for secondary pin
2.9 mm for primary pin
- Maximum PCB thickness 2.4 mm
- Wave soldering profile maximum 260 °C, 10 s
- No clean process only

Any primary conductor must be placed in the PCB at the requested insulation distance regarding the secondary side (see also paragraph "Insulation around the CTSR transducer housing").

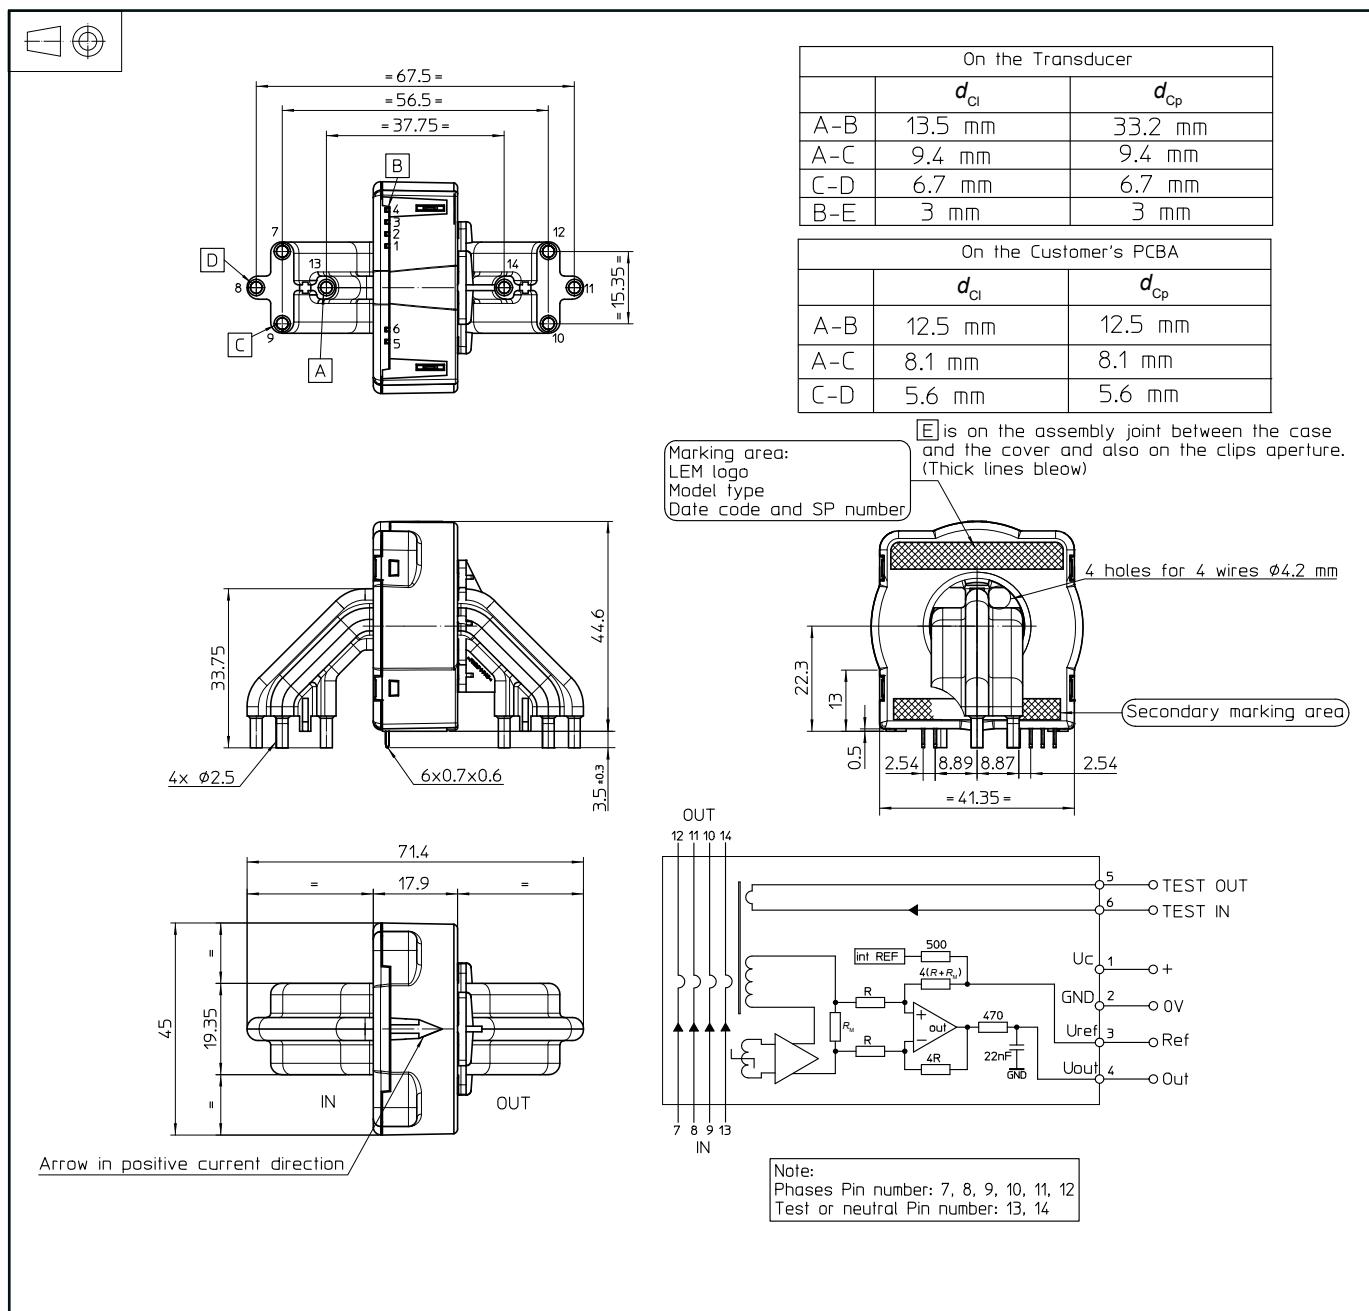Dimensions (in mm, general tolerance ± 0.3 mm)


IMPORTANT NOTICE

The information in this document is considered accurate and reliable. However, LEM International SA and any company directly or indirectly controlled by LEM Holding SA ("LEM") do not provide any guarantee or warranty, expressed or implied, regarding the accuracy or completeness of this information and are not liable for any consequences resulting from its use. LEM shall not be responsible for any indirect, incidental, punitive, special, or consequential damages (including, but not limited to, lost profits, lost savings, business interruption, costs related to the removal or replacement of products, or rework charges) regardless of whether such damages arise from tort (including negligence), warranty, breach of contract, or any other legal theory.

LEM reserves the right to update the information in this document, including specifications and product descriptions, at any time without prior notice. Information in this document replaces any previous versions of this document. No license to any intellectual property is granted by LEM through this document, either explicitly or implicitly. Any information and product described herein is subject to export control regulations.

LEM products may possess either unidentified or documented vulnerabilities. It is the sole responsibility of the purchaser to design and operate their applications and products in a manner that mitigates the impact of these vulnerabilities. LEM disclaims any liability for such vulnerabilities. Customers must select products with security features that best comply with applicable rules, regulations, and standards for their intended use. The purchaser is responsible for making final design decisions regarding its products and for ensuring compliance with all legal, regulatory, and security-related requirements, irrespective of any information or support provided by LEM.

LEM products are not intended, authorized, or warranted for use in life support, life-critical, or safety-critical systems or equipment, nor in applications where failure or malfunction of an LEM product could result in personal injury, death, or significant property or environmental damage. LEM and its suppliers do not assume liability for the inclusion and/or use of LEM products in such equipment or applications; thus, this inclusion and/or use is at the purchaser's own and sole risk. Unless explicitly stated that a specific LEM product is automotive qualified, it should not be used in automotive applications. LEM does not accept liability for the inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

Applications that are described herein are for illustrative purposes only. LEM makes no representation or warranty that LEM products will be suitable for a particular purpose, a specified use or application. The purchaser is solely responsible for the design and operation of its applications and devices using LEM products, and LEM accepts no liability for any assistance with any application or purchaser product design. It is purchaser's sole responsibility to determine whether the LEM product is suitable and fit for the purchaser's applications and products planned, as well as for the planned application and use of purchaser's third-party customer(s).

Stressing and using LEM products at or above limiting values will cause permanent damage to the LEM product and potentially to any device embedding or operating with LEM product. Limiting values are stress ratings only and operation of the LEM product at or above conditions and limits given in this document is not warranted. Continuous or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the LEM product.

LEM products are sold subject to the general terms and conditions of commercial sale, as published at www.lem.com unless otherwise agreed in a specific written agreement. LEM hereby expressly rejects the purchaser's general terms and conditions for purchasing LEM products by purchaser. Any terms and conditions contained in any document issued by the purchaser either before or after issuance of any document by LEM containing or referring to the general terms and conditions of sale are explicitly rejected and disregarded by LEM, and the document issued by the purchaser is wholly inapplicable to any sale or licensing made by LEM and is not binding in any way on LEM.

© 2025 LEM INTERNATIONAL SA – All rights reserved