


High Performance Current Transducer

ITN 12-P ULTRASTAB

For the electronic measurement of currents: DC, AC, pulsed..., with galvanic separation between the primary circuit and the secondary circuit.

$$I_{PM} = 0 \dots 25 \text{ A}$$



Electrical data

I_{PND}	Primary continuous direct current (nominal)	12.5	A
I_{PN}	Primary nominal RMS current	8.8	A
I_{PM}	Primary current, measuring range (peak limit)	0 ... ± 25	A
\hat{I}_{Pmax}	Maximum overload capability 100 ms ¹⁾	± 62.5	A
R_M	Measuring resistance	R_{Mmin} R_{Mmax}	
	Over operating current, temperature and supply voltage range	0 ²⁾	Ω
I_{SND}	Secondary continuous direct current (nominal)	0 ... ± 50	mA
I_{SN}	Secondary nominal RMS current	35	mA
K_N	Conversion ratio	1 : 250	
U_C	Supply voltage (± 5 %)	± 15	V
I_C	Current consumption ± 15 V	$\leq 60 + I_S$	mA

Accuracy - Dynamic performance data

ϵ_L	Linearity error ³⁾	≤ 4	ppm
I_{OE}	Electrical offset current + self magnetization + effect of earth magnetic field @ $T_A = 25^\circ\text{C}$ ³⁾	< 500	ppm
ΔI_{OE}	Offset stability (no load) ³⁾	< 5	ppm/month
TCI_{OE}	Temperature coefficient of I_{OE} ($10^\circ\text{C} \dots 45^\circ\text{C}$) ³⁾	< 2	ppm/K
	Offset vs. power supply stability @ $T_A = 25^\circ\text{C}$ ³⁾		
	@ $U_C = \pm 15 \text{ V} \pm 5 \%$	< 1	ppm/% of $U_C = \pm 15 \text{ V}$

General data

RH	Relative humidity (non condensing)	20 ... 80	%
T_A	Ambient operating temperature	$+10 \dots +45$	$^\circ\text{C}$
T_S	Ambient storage temperature	$-20 \dots +85$	$^\circ\text{C}$
R_S	Resistance of secondary winding @ $T_A = 25^\circ\text{C}$	90	Ω
m	Mass	0.35	kg

Notes: ¹⁾ Single pulse only, not AC.

Overload conditions of use as described on page 3.

²⁾ Max value of R_M is given in figures on page 4.

³⁾ All ppm figures refer to secondary measuring range 50 mA.

Features

- Closed loop (compensated) current transducer using an extremely accurate zero flux detector
- Mountable onto a PCB
- Metal housing for high immunity against external interference.

Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Wide frequency bandwidth
- High immunity to external electrostatic and magnetic fields interference
- High resolution
- Low noise on output signal
- Low noise feedback to main conductor.

Applications

- Feed back element in precision current regulated devices (power supplies...)
- Calibration unit
- Precise and high-stability inverters
- Energy measurement
- Medical equipment.

Application domain

- Industrial and Medical.

Current Transducer ITN 12-P ULTRASTAB

Insulation coordination

Between primary and secondary

U_b	Rated insulation RMS voltage, reinforced insulation	150	V
	Rated insulation RMS voltage, single insulation	300	V
	with IEC 61010-1 standards and following conditions		
	- Over voltage category III		
	- Pollution degree 2		
U_d	RMS voltage for AC insulation test, 50/60 Hz, 1 min	2.4 ¹⁾	kV
\hat{U}_w	Impulse withstand voltage 1.2/50 μ s	4.3	kV
U_b	Rated insulation RMS voltage, reinforced insulation	150	V
	Rated insulation RMS voltage, single insulation	300	V
	with EN 50178 standards and following conditions		
	- Over voltage category III		
	- Pollution degree 2		
		Min	
d_{cp}	Creepage distance	4.7	mm
d_{cl}	Clearance	3.3	mm
CTI	Comparative tracking index (group IIIb)	175	

Note: ¹⁾ Between primary and secondary + shield.

Safety



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (e.g. primary busbar, power supply). Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a build-in device, whose conducting parts must be inaccessible after installation. A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

Current Transducer ITN 12-P ULTRASTAB

Output noise figures: @ 25 °C

Random RMS noise ppm:

0 – 10 Hz	0 – 100 Hz	0 – 1 kHz	0 – 10 kHz	0 – 100 kHz
< 0.4	< 0.5	< 0.7	< 5	< 10

Re-injected RMS noise measured on primary cable < 5 μ V
(DC – 50 kHz)

Dynamic performance data

BW	Frequency bandwidth for small signal 0.5 %, of $I_{PND C}$ (± 1 dB)	DC ... 100	kHz
	(± 3 dB)	DC ... > 500	kHz
t_r	Step response time ¹⁾ to 90 % of $I_{P N}$	< 1	μ s

Note: ¹⁾ For a $di/dt > 20$ A/ μ s.

Over current protection - Electrical specification - Status

As soon as electrical saturation appears, the transducer switches from normal operation to over current mode.

This electrical saturation appears in any case beyond twice the measuring range.



The primary current corresponding to this trip level is related to the temperature inside the transducer.

Under these conditions:

- Fault level $I_p > 200$ % of $I_{PND C}$
- Primary current must not exceed 25 A
- If the primary current has exceeded the maximum $I_p = 25$ A or the device has been powered up with primary current flowing, it will enter the overload state. In this situation the output current will remain higher than ± 100 mA (maximum ± 120 mA with 20 ohm burden resistor), independent of the primary current.
- Action in case of overload:
 1. Make sure the primary current is switched off.
 2. Power down the device for one second.
 3. Power up the device.
 4. Reestablish the primary current.

Current Transducer ITN 12-P ULTRASTAB

Max measuring resistance versus Max secondary current

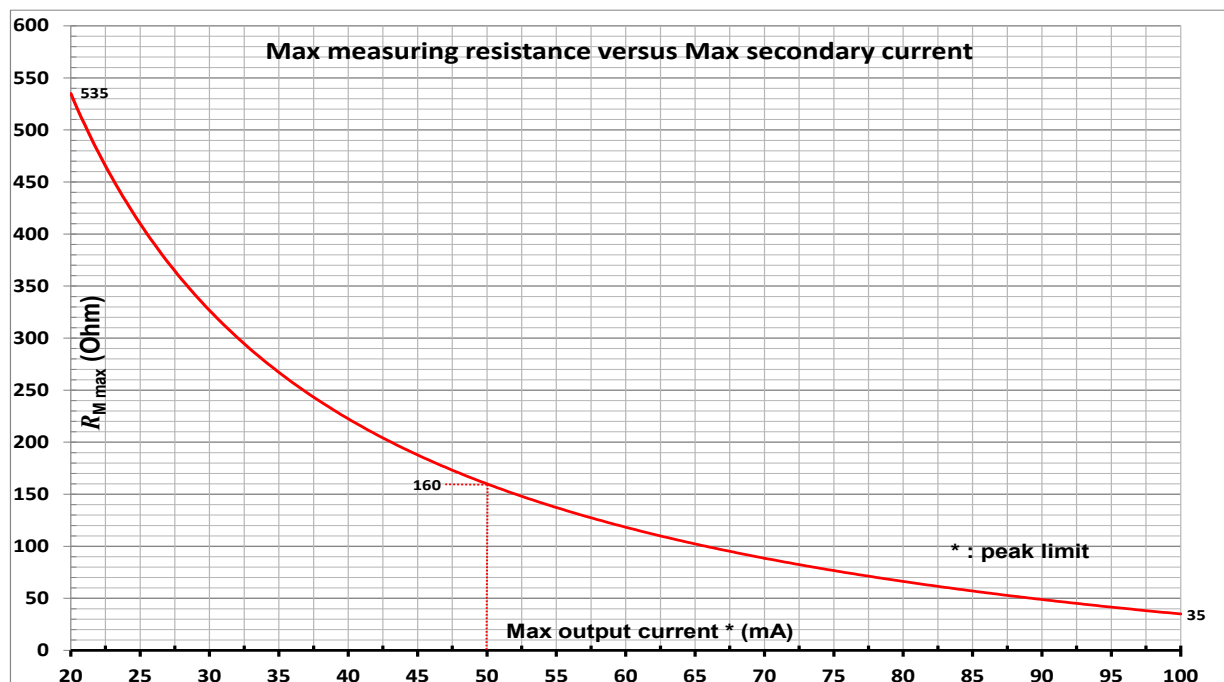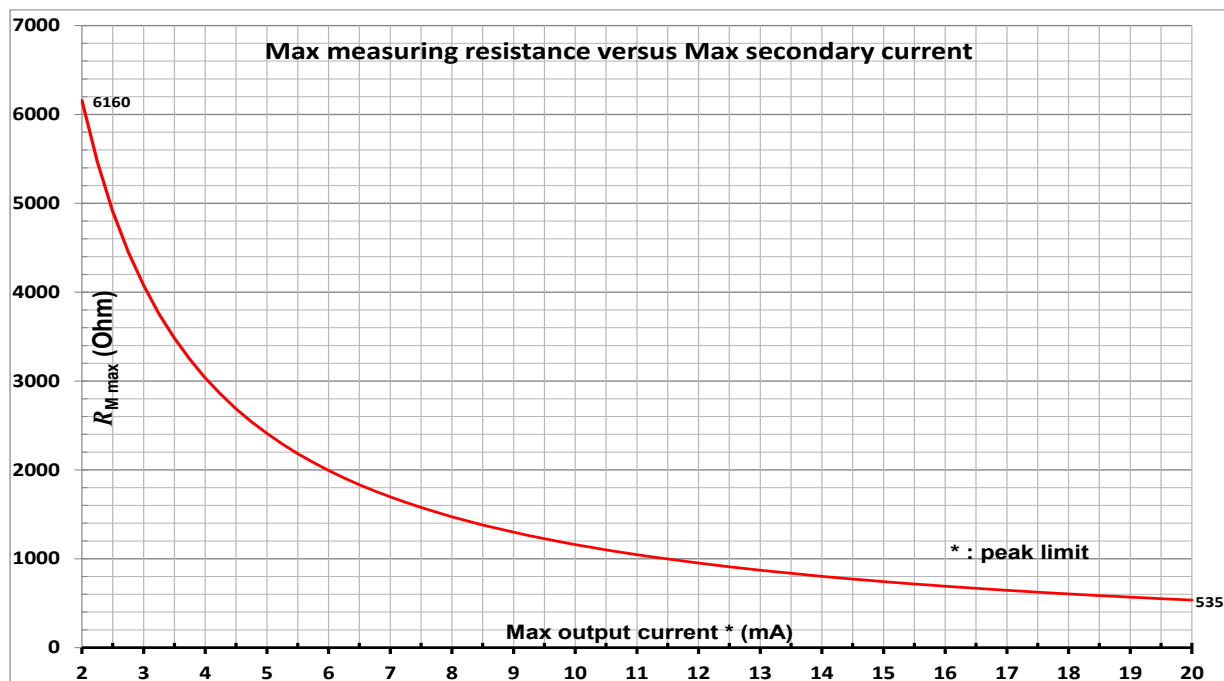

IMPORTANT NOTICE

The information in this document is considered accurate and reliable. However, LEM International SA and any company directly or indirectly controlled by LEM Holding SA ("LEM") do not provide any guarantee or warranty, expressed or implied, regarding the accuracy or completeness of this information and are not liable for any consequences resulting from its use. LEM shall not be responsible for any indirect, incidental, punitive, special, or consequential damages (including, but not limited to, lost profits, lost savings, business interruption, costs related to the removal or replacement of products, or rework charges) regardless of whether such damages arise from tort (including negligence), warranty, breach of contract, or any other legal theory.

LEM reserves the right to update the information in this document, including specifications and product descriptions, at any time without prior notice. Information in this document replaces any previous versions of this document. No license to any intellectual property is granted by LEM through this document, either explicitly or implicitly. Any Information and product described herein is subject to export control regulations.

LEM products may possess either unidentified or documented vulnerabilities. It is the sole responsibility of the purchaser to design and operate their applications and products in a manner that mitigates the impact of these vulnerabilities. LEM disclaims any liability for such vulnerabilities. Customers must select products with security features that best comply with applicable rules, regulations, and standards for their intended use. The purchaser is responsible for making final design decisions regarding its products and for ensuring compliance with all legal, regulatory, and security-related requirements, irrespective of any information or support provided by LEM.

LEM products are not intended, authorized, or warranted for use in life support, life-critical, or safety-critical systems or equipment, nor in applications where failure or malfunction of an LEM product could result in personal injury, death, or significant property or environmental damage. LEM and its suppliers do not assume liability for the inclusion and/or use of LEM products in such equipment or applications; thus, this inclusion and/or use is at the purchaser's own and sole risk. Unless explicitly stated that a specific LEM product is automotive qualified, it should not be used in automotive applications. LEM does not accept liability for the inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

Applications that are described herein are for illustrative purposes only. LEM makes no representation or warranty that LEM products will be suitable for a particular purpose, a specified use or application. The purchaser is solely responsible for the design and operation of its applications and devices using LEM products, and LEM accepts no liability for any assistance with any application or purchaser product design. It is purchaser's sole responsibility to determine whether the LEM product is suitable and fit for the purchaser's applications and products planned, as well as for the planned application and use of purchaser's third-party customer(s).

Stressing and using LEM products at or above limiting values will cause permanent damage to the LEM product and potentially to any device embedding or operating with LEM product. Limiting values are stress ratings only and operation of the LEM product at or above conditions and limits given in this document is not warranted. Continuous or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the LEM product.

LEM products are sold subject to the general terms and conditions of commercial sale, as published at www.lem.com unless otherwise agreed in a specific written agreement. LEM hereby expressly rejects the purchaser's general terms and conditions for purchasing LEM products by purchaser. Any terms and conditions contained in any document issued by the purchaser either before or after issuance of any document by LEM containing or referring to the general terms and conditions of sale are explicitly rejected and disregarded by LEM, and the document issued by the purchaser is wholly inapplicable to any sale or licensing made by LEM and is not binding in any way on LEM.

© 2025 LEM INTERNATIONAL SA – All rights reserved