


Current Transducer LAH 25-NP/SP1

For the electronic measurement of currents: DC, AC, pulsed..., with galvanic separation between the primary circuit and the secondary circuit.



$$I_{PN} = 8-12-25 \text{ A}$$



Electrical data

I_{PN}	Primary nominal RMS current	25	A
I_{PM}	Primary current, measuring range ¹⁾	0 ... 55	A
R_M	Measuring resistance @ ²⁾	$T_A = 70\text{ }^{\circ}\text{C}$	$T_A = 85\text{ }^{\circ}\text{C}$
		$R_{M\text{ min}}$ $R_{M\text{ max}}$	$R_{M\text{ min}}$ $R_{M\text{ max}}$
	with $\pm 12\text{ V}$	@ I_{PN} [$\pm$ At DC]	0 284 0 280 Ω
		@ I_{PN} [At RMS] ³⁾	0 182 0 178 Ω
	with $\pm 15\text{ V}$	@ I_{PN} [$\pm$ At DC]	67 398 70 394 Ω
		@ I_{PN} [At RMS] ³⁾	67 263 70 259 Ω
		@ $I_P < I_{PN}$ ⁴⁾	
I_{SN}	Secondary nominal RMS current	25	mA
N_P/N_S	Turns ratio	1-2-3 : 1000	
U_C	Supply voltage ($\pm 5\text{ }\%$)	$\pm 12 \dots 15$	V
I_C	Current consumption	10 (@ $\pm 15\text{ V}$) + I_S	mA

Accuracy - Dynamic performance data

ϵ_{tot}	Total error ⁵⁾ @ I_{PN} , $T_A = 25^\circ\text{C}$	± 0.3	%
ϵ_L	Linearity error	< 0.2	%
I_O	Offset current referred to primary @ $I_P = 0$, $T_A = 25^\circ\text{C}$	Typ ± 150	mA
I_O	Offset current referred to secondary @ $I_P = 0$, $T_A = 25^\circ\text{C}$	Max ± 0.15	mA
I_{OM}	Magnetic offset current @ $I_P = 0$, referred to secondary and specified R_M , after an overload of $5 \times I_{PN}$	± 0.20 ± 0.25	mA
I_{OT}	Temperature variation of I_O , referred to secondary		
	0 $^\circ\text{C} \dots +70^\circ\text{C}$	± 0.10 ± 0.60	mA
	$-25^\circ\text{C} \dots +85^\circ\text{C}$	± 0.10 ± 0.70	mA
t_{D10}	Delay time to 10 % of the final output value for I_{PN} step ⁶⁾ < 200		ns
t_{D90}	Delay time to 90 % of the final output value for I_{PN} step ⁶⁾ < 500		ns
BW	Frequency bandwidth (-1 dB)	DC ... 200	kHz

General data

T_A	Ambient operating temperature	$-25 \dots +85$	$^\circ\text{C}$
T_{Ast}	Ambient storage temperature	$-40 \dots +90$	$^\circ\text{C}$
R_S	Resistance of secondary winding @ $T_A = 70^\circ\text{C}$	72	Ω
	@ $T_A = 85^\circ\text{C}$	76	Ω
m	Mass	20	g
	Standards	EN 50178: 1997	

Notes: ¹⁾ During 10 s, with $R_M \leq 109 \Omega$ ($U_C = \pm 15 \text{ V}$)
²⁾ Calculation of $R_{M \min}$ with the maximum power of the transistors = 0.307 W @ 70°C and the maximum power of the transistors = 0.302 W @ 85°C
³⁾ Sinusoidal wave 50 Hz
⁴⁾ The minimum measuring resistance R_M may be lower (see "LAH technical information" leaflet)
⁵⁾ Without I_O & I_{OM}
⁶⁾ For a $di/dt = 200 \text{ A}/\mu\text{s}$.

Features

- Closed loop (compensated) multi-range current transducer using the Hall effect
- Printed circuit board mounting
- Insulating plastic case recognized according to UL 94-V0.

Special feature

- Different spacing of primary bus bars.

Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized delay time
- No insertion losses
- High immunity to external interference
- Current overload capability.

Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

Application domain

- Industrial.

Current Transducer LAH 25-NP/SP1

Insulation coordination

U_d	RMS voltage for AC insulation test, 50 Hz, 1 min	5	kV
U_{Ni}	Impulse withstand voltage 1.2/50 μ s	12	kV
U_t	Partial discharge RMS test voltage ($q_m < 10$ pC)	> 2	kV
		Min	
d_{Cp}	Creepage distance ¹⁾	12	mm
d_{Cl}	Clearance ¹⁾	12	mm
CTI	Comparative tracking index (group I)	175	

Note: ¹⁾ On PCB with soldering pattern UTEC93-703.

Applications examples

According to EN 50178 and IEC 61010-1 standards and following conditions:

- Over voltage category OV 3
- Pollution degree PD2
- Non-uniform field

	EN 50178	IEC 61010-1
d_{Cp}, d_{Cl}, U_{Ni}	Rated insulation voltage	Nominal voltage
Basic insulation	1000 V	1000 V
Reinforced insulation	500 V	500 V

Safety

This transducer must be used in limited-energy secondary circuits according to IEC 61010-1.



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions. Caution, risk of electrical shock




Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply). Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a build-in device, whose conducting parts must be inaccessible after installation. A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

Dimensions LAH 25-NP/SP1 (in mm)

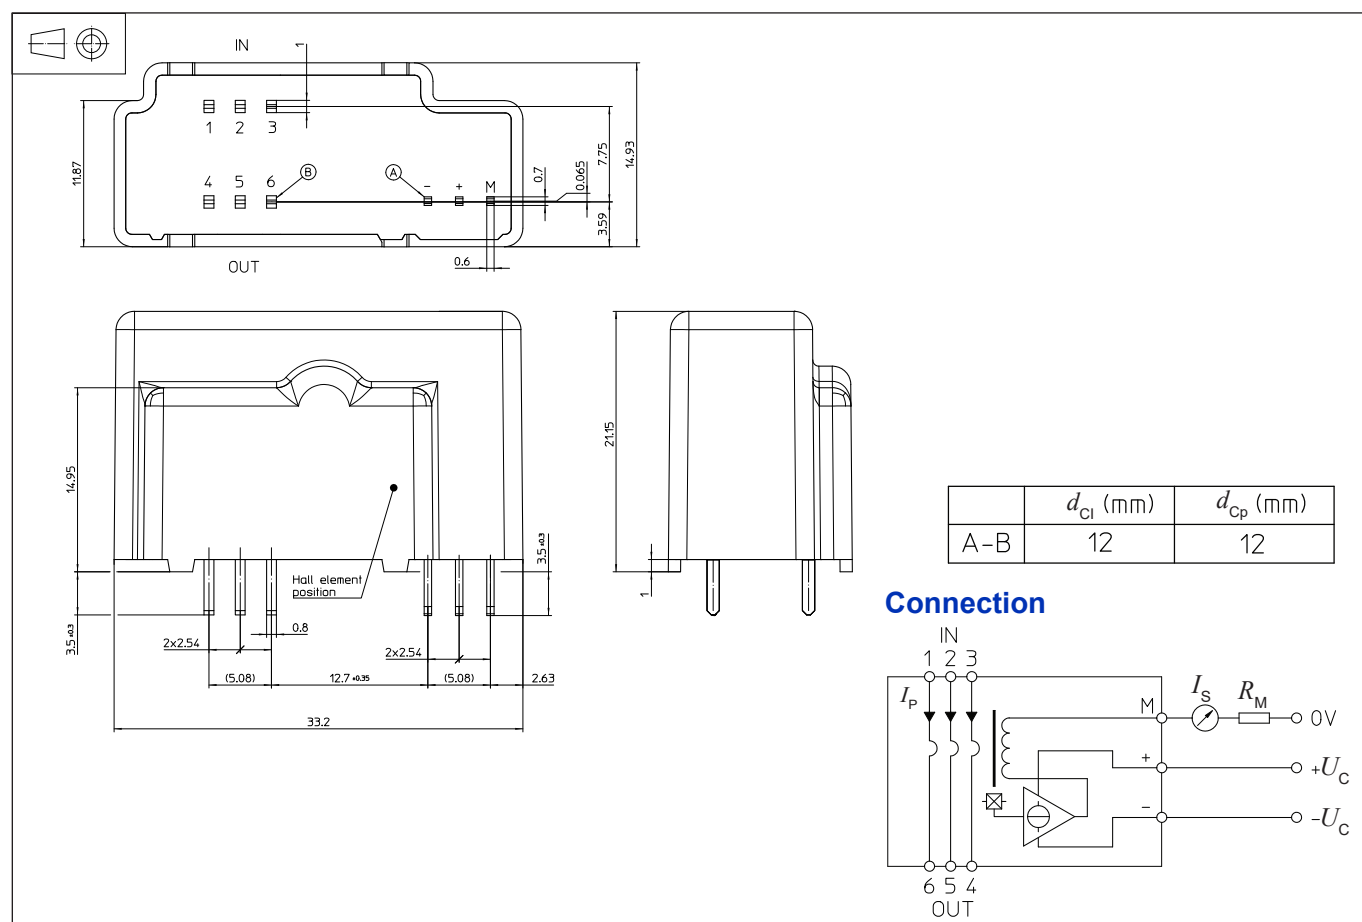

Number of primary turns	Primary current nominal I_{PN} [A]	Primary current maximum I_P [A]	Nominal output current I_{SN} [mA]	Turns ratio N_P/N_S	Primary resistance R_P [mW]	Primary insertion inductance L_P [μH]	Recommended PCB connections
1	25	55	25	1 : 1000	0.18	0.012	IN 3 2 1 OUT 4 5 6
2	12	27	24	2 : 1000	0.81	0.054	IN 3 2 1 OUT 4 5 6
3	8	18	24	3 : 1000	1.62	0.110	IN 3 2 1 OUT 4 5 6

Mechanical characteristics

- General tolerance ± 0.2 mm
- Fastening & connection of primary 6 pins 1×0.8 mm
- Recommended PCB hole 1.5 mm
- Fastening & connection of secondary 3 pins 0.7×0.6 mm
- Recommended PCB hole 1.2 mm

Remarks

- I_S is positive when I_P flows from terminals 1, 2, 3 (IN) to terminals 6, 5, 4 (OUT).
- The jumper temperature and PCB should not exceed 100 °C.

IMPORTANT NOTICE

The information in this document is considered accurate and reliable. However, LEM International SA and any company directly or indirectly controlled by LEM Holding SA ("LEM") do not provide any guarantee or warranty, expressed or implied, regarding the accuracy or completeness of this information and are not liable for any consequences resulting from its use. LEM shall not be responsible for any indirect, incidental, punitive, special, or consequential damages (including, but not limited to, lost profits, lost savings, business interruption, costs related to the removal or replacement of products, or rework charges) regardless of whether such damages arise from tort (including negligence), warranty, breach of contract, or any other legal theory.

LEM reserves the right to update the information in this document, including specifications and product descriptions, at any time without prior notice. Information in this document replaces any previous versions of this document. No license to any intellectual property is granted by LEM through this document, either explicitly or implicitly. Any Information and product described herein is subject to export control regulations.

LEM products may possess either unidentified or documented vulnerabilities. It is the sole responsibility of the purchaser to design and operate their applications and products in a manner that mitigates the impact of these vulnerabilities. LEM disclaims any liability for such vulnerabilities. Customers must select products with security features that best comply with applicable rules, regulations, and standards for their intended use. The purchaser is responsible for making final design decisions regarding its products and for ensuring compliance with all legal, regulatory, and security-related requirements, irrespective of any information or support provided by LEM.

LEM products are not intended, authorized, or warranted for use in life support, life-critical, or safety-critical systems or equipment, nor in applications where failure or malfunction of an LEM product could result in personal injury, death, or significant property or environmental damage. LEM and its suppliers do not assume liability for the inclusion and/or use of LEM products in such equipment or applications; thus, this inclusion and/or use is at the purchaser's own and sole risk. Unless explicitly stated that a specific LEM product is automotive qualified, it should not be used in automotive applications. LEM does not accept liability for the inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

Applications that are described herein are for illustrative purposes only. LEM makes no representation or warranty that LEM products will be suitable for a particular purpose, a specified use or application. The purchaser is solely responsible for the design and operation of its applications and devices using LEM products, and LEM accepts no liability for any assistance with any application or purchaser product design. It is purchaser's sole responsibility to determine whether the LEM product is suitable and fit for the purchaser's applications and products planned, as well as for the planned application and use of purchaser's third-party customer(s).

Stressing and using LEM products at or above limiting values will cause permanent damage to the LEM product and potentially to any device embedding or operating with LEM product. Limiting values are stress ratings only and operation of the LEM product at or above conditions and limits given in this document is not warranted. Continuous or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the LEM product.

LEM products are sold subject to the general terms and conditions of commercial sale, as published at www.lem.com unless otherwise agreed in a specific written agreement. LEM hereby expressly rejects the purchaser's general terms and conditions for purchasing LEM products by purchaser. Any terms and conditions contained in any document issued by the purchaser either before or after issuance of any document by LEM containing or referring to the general terms and conditions of sale are explicitly rejected and disregarded by LEM, and the document issued by the purchaser is wholly inapplicable to any sale or licensing made by LEM and is not binding in any way on LEM.

© 2025 LEM INTERNATIONAL SA – All rights reserved