


Current Transducer LF 2005-S/SP9

For the electronic measurement of currents: DC, AC, pulsed..., with galvanic separation between the primary circuit and the secondary circuit.



$$I_{PN} = 1000 \text{ A}$$



Electrical data

I_{PN}	Primary nominal RMS current	1000	A																																
I_{PM}	Primary current, measuring range @ $\pm 24 \text{ V}$	0 ... ± 2000	A																																
$\hat{I}_{Pmax}$	Primary withstand peak current (maximum)	50	kA																																
R_M	Measuring resistance	<table> <tr> <th colspan="2">$T_A = 70^\circ \text{C}$</th><th colspan="2">$T_A = 85^\circ \text{C}$</th></tr> <tr> <th>R_{Mmin}</th><th>R_{Mmax}</th><th>R_{Mmin}</th><th>R_{Mmax}</th></tr> <tr> <td colspan="4">with $\pm 15 \text{ V}$</td></tr> <tr> <td></td><td>@ $\pm 1000 \text{ A}_{max}$</td><td>0</td><td>27 Ω</td></tr> <tr> <td></td><td>@ $\pm 1700 \text{ A}_{max}$</td><td>0</td><td>2</td></tr> <tr> <td colspan="4">with $\pm 24 \text{ V}$</td></tr> <tr> <td></td><td>@ $\pm 1000 \text{ A}_{max}$</td><td>0</td><td>69 Ω</td></tr> <tr> <td></td><td>@ $\pm 2000 \text{ A}_{max}$</td><td>0</td><td>18 Ω</td></tr> </table>		$T_A = 70^\circ \text{C}$		$T_A = 85^\circ \text{C}$		R_{Mmin}	R_{Mmax}	R_{Mmin}	R_{Mmax}	with $\pm 15 \text{ V}$					@ $\pm 1000 \text{ A}_{max}$	0	27 Ω		@ $\pm 1700 \text{ A}_{max}$	0	2	with $\pm 24 \text{ V}$					@ $\pm 1000 \text{ A}_{max}$	0	69 Ω		@ $\pm 2000 \text{ A}_{max}$	0	18 Ω
$T_A = 70^\circ \text{C}$		$T_A = 85^\circ \text{C}$																																	
R_{Mmin}	R_{Mmax}	R_{Mmin}	R_{Mmax}																																
with $\pm 15 \text{ V}$																																			
	@ $\pm 1000 \text{ A}_{max}$	0	27 Ω																																
	@ $\pm 1700 \text{ A}_{max}$	0	2																																
with $\pm 24 \text{ V}$																																			
	@ $\pm 1000 \text{ A}_{max}$	0	69 Ω																																
	@ $\pm 2000 \text{ A}_{max}$	0	18 Ω																																
I_{SN}	Secondary nominal RMS current	200	mA																																
N_P/N_S	Turns ratio	1 : 5000																																	
U_C	Supply voltage ($\pm 10 \%$)	$\pm 15 \dots 24$	V																																
I_C	Current consumption	33 (@ $\pm 24 \text{ V}$) + I_S	mA																																

Accuracy - Dynamic performance data

ε_L	Linearity error	< 0.1	%
t_{D90}	Delay time to 90 % of the final output value for I_{PN} step ¹⁾ < 1		μs
BW	Frequency bandwidth (-1 dB)	DC ... 100	kHz

Test circuit

N_T	Number of turns (test winding)	1000	
R_T	Resistance of test winding @ $T_A = 85^\circ \text{C}$	16	Ω
I_T	Test current	0.1 ²⁾	A

Remarks:

- Use a current generator for the test winding (high impedance)
- Otherwise a minimum resistance in series with the test winding is needed:
 - 30 Ω @ $T_A = -25 \dots +85^\circ \text{C}$
 - 50 Ω @ $T_A = -40 \dots +85^\circ \text{C}$

General data

T_A	Ambient operating temperature	$-40 \dots +85$	$^\circ \text{C}$
T_{Ast}	Ambient storage temperature	$-40 \dots +85$	$^\circ \text{C}$
R_S	Resistance of secondary winding @ $T_A = 70^\circ \text{C}$	33	Ω
	@ $T_A = 85^\circ \text{C}$	34	Ω
m	Mass	1.4	kg
	Standards	EN 50155: 2021 ³⁾ EN 50121-3-2: 2016	

Notes: ¹⁾ For a $di/dt = 100 \text{ A}/\mu\text{s}$

²⁾ Maximum 1 A during 10 seconds 6 times per hour

³⁾ Additional information available on request.

Features

- Closed loop (compensated) current transducer using the Hall effect
- Insulating plastic case recognized according to UL 94-V0.

Special features

- $I_{PN} = 1000 \text{ A}$
- $I_{PM} = 0 \dots \pm 2000 \text{ A}$
- $U_C = \pm 15 \dots 24 (\pm 10 \%) \text{ V}$
- $U_d = 12 \text{ kV}$
- $N_T = 1000$ turns
- $T_A = -40^\circ \text{C} \dots 85^\circ \text{C}$
- Secondary connection on shielded cable $5 \times 0.5 \text{ mm}^2$.

Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

Applications

- Single or three phase inverter
- Propulsion and braking chopper
- Propulsion converter
- Auxiliary converter
- Battery charger.

Application Domain

- Railway (fixed installations and onboard).

Current Transducer LF 2005-S/SP9

Insulation coordination

U_d	RMS voltage for AC insulation test, 50 Hz, 1 min	12 ¹⁾	kV
		500 ²⁾	V
U_t	Partial discharge RMS test voltage ($q_m < 10$ pC)	≥ 4.1 ³⁾	kV
		Min	
d_{cp}	Creepage distance	51.5	mm
d_{cl}	Clearance	51.5	mm
CTI	Comparative tracking index (group I)	600	


Notes: ¹⁾ Between primary and secondary + test
²⁾ Between shield and secondary + test
³⁾ Test performed with a non-insulated bus bar
(dimensions 290 × 50 × 10 mm) centered in the aperture.

DC offset [At]

	Maximum range of measured current			
Temperature range	-100 ... +100 A	-500 ... +500 A	-1000 ... +1000 A	-2000 ... +2000 A
-25 °C ... +85 °C	±3.6	±3.8	±4.0	±4.8
-40 °C ... +85 °C	±5.1	±5.3	±5.5	±6.3

Maximum DC offset for different ranges of temperature and measured current.

Wiring plan for DC component measuring

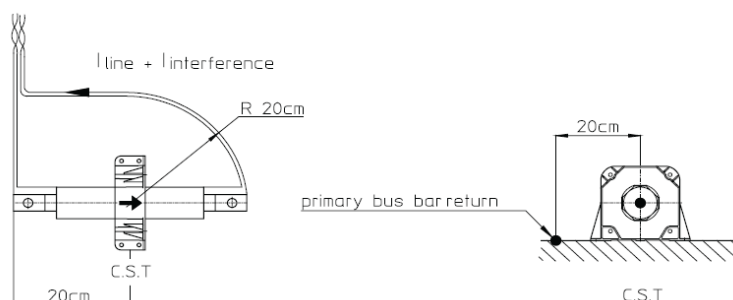

Accuracy for the measurement of a single frequency signal

Frequency	20 ... 200 Hz		200 ... 3000 Hz	
Amplitude	Amplitude Error [%]	Phase Error [%]	Amplitude Error [%]	Phase Error [%]
0.1 ... 0.5 A	±55	-15.0	±55	22
0.5 ... 1 A	±17	-14.0	±48	22
1 ... 2 A	±7.0	-7.4	±32	14
2 ... 10 A	±6.6	-1.6	±17	6.2
10 ... 20 A	±3.7	< -1.0	±6.8	-1.4
20 ... 50 A	±2.8	< -1.0	±3.6	< -1.0

Amplitude error: in % of the measured signal.

Phase error: in degrees with respect to the measured signal.

Maximum amplitude and phase errors for single frequency signals.

High error values are due to zero-crossing distortion.

Accuracy for the measurement of a signals added to a DC current ≥ 10 A

Frequency	20 ... 200 Hz		200 ... 3000 Hz	
Amplitude	Amplitude Error [%]	Phase Error [%]	Amplitude Error [%]	Phase Error [%]
0.1 ... 0.5 A	± 2.2	-1.6	± 4.4	1.4
0.5 ... 1 A	± 2.5	-1.6	± 4.1	< -1.0
1 ... 2 A	± 2.5	-1.6	± 4.1	< -1.0
2 ... 10 A	± 6.1	-1.1	± 7.0	< -1.0
10 ... 20 A	± 6.1	< -1.0	± 8.8	< -1.0
20 ... 50 A	± 6.0	< -1.0	± 7.5	< -1.0

Amplitude error: in % of the measured signal.

Phase error: in degrees with respect to the measured signal.

Maximum amplitude and phase errors for signals added to a DC fundamental.

Accuracy for the measurement of a signals added to an AC (fundamental) current ($15 \text{ Hz} < f < 100 \text{ Hz}$), ≥ 10 A RMS

Frequency	20 ... 200 Hz		200 ... 3000 Hz	
Amplitude	Amplitude Error [%]	Phase Error [%]	Amplitude Error [%]	Phase Error [%]
0.1 ... 0.5 A	± 1.6	< -1.0	± 2.3	< -1.0
0.5 ... 1 A	± 1.2	< -1.0	± 1.9	< -1.0
1 ... 2 A	± 0.9	< -1.0	± 1.3	< -1.0
2 ... 10 A	± 0.6	< -1.0	± 0.8	< -1.0
10 ... 20 A	± 0.6	< -1.0	± 0.7	< -1.0
20 ... 50 A	± 1.0	< -1.0	± 1.0	< -1.0

Amplitude error: in % of the measured signal.


Phase error: in degrees with respect to the measured signal.

Maximum amplitude and phase errors for signals added to an AC fundamental.


Influence regarding external magnetic fields

Frequency	0 ... 5 Hz	0 ... 5 Hz
Direction	Max error	Max error
	[mAt _{RMS} per A/m]	[mAt _{RMS} per A/m]
X-axis	0.16	0.18
Y-axis	3.3	5.3
Z-axis	0.04	0.08

Error in the measurement of the primary current [mA_{RMS}] due to external magnetic fields at the specified frequencies for the three axes of the transducer

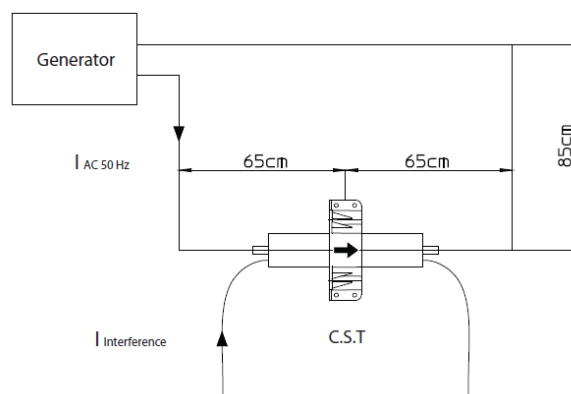


Wiring plan for measurements with an AC component.

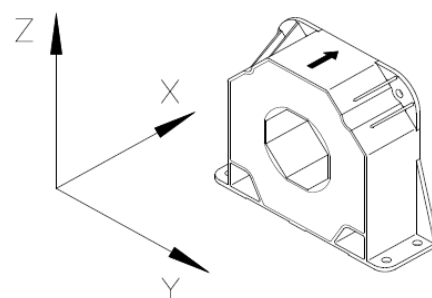

Orientation of transducer during magnetic field sensitivity testing.

Dimensions LF 2005-S/SP9 (in mm)

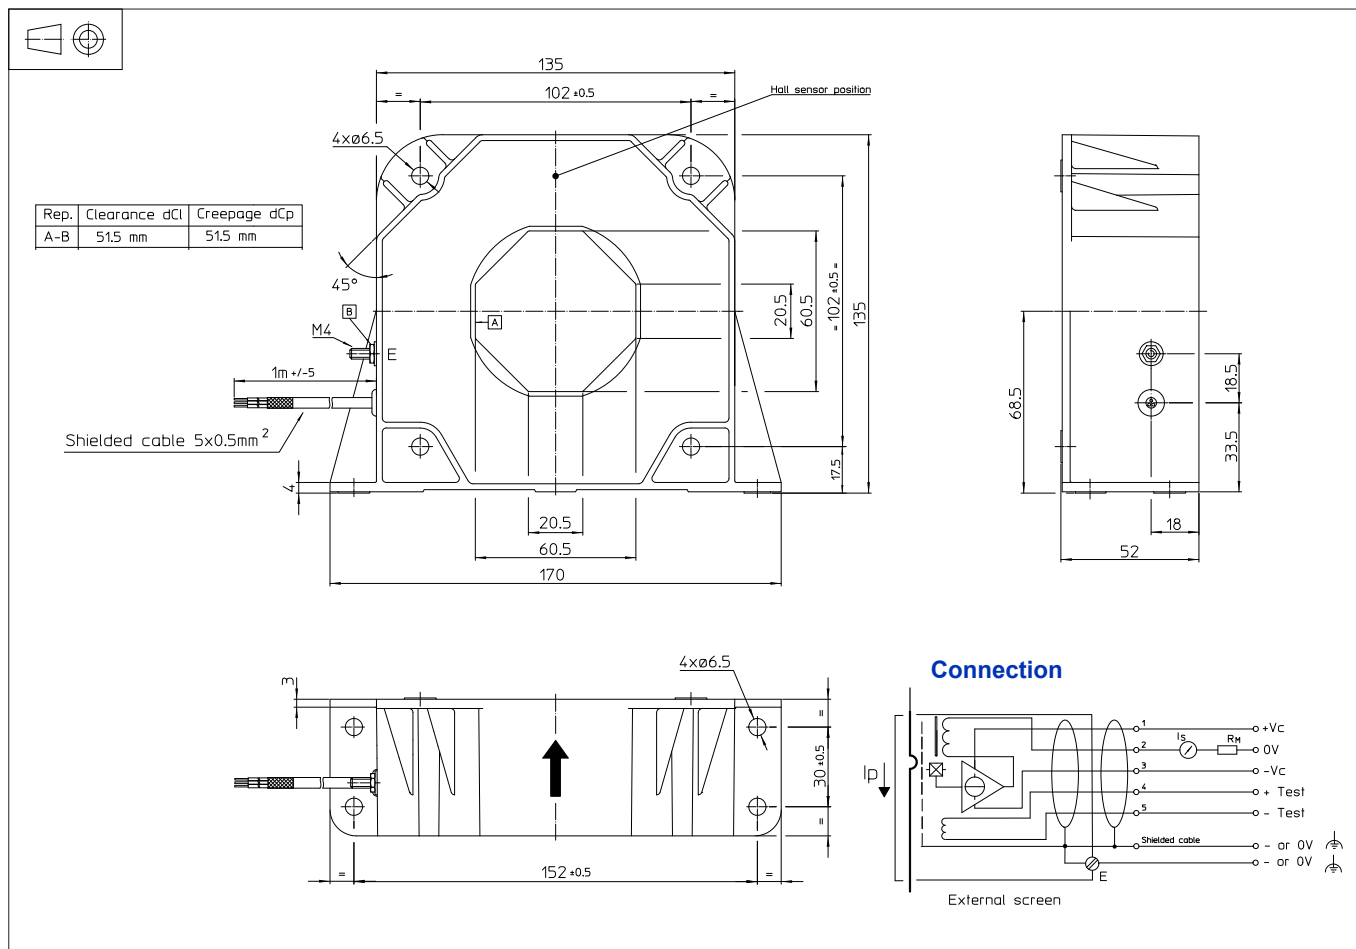

Mechanical characteristics

- General tolerance ± 1 mm
- Transducer fastening
Vertical or flat position 4 holes Ø 6.5 mm
4 M6 steel screws
- Recommended fastening torque 5.5 Nm
- Primary through-hole 60.5 × 20.5
Or Ø 56 mm max
- Connection of secondary shielded cable 5 × 0.5 mm²
- Connection shields M4 threaded stud
- Recommended fastening torque 1.2 Nm

Remarks

- I_s is positive when I_p flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 100 °C.
- Dynamic performances (di/dt and delay time) are best with a single bar completely filling the primary hole.

Safety

This transducer must be used in limited-energy secondary circuits according to IEC 61010-1.



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply).

Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a build-in device, whose conducting parts must be inaccessible after installation.

A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

IMPORTANT NOTICE

The information in this document is considered accurate and reliable. However, LEM International SA and any company directly or indirectly controlled by LEM Holding SA ("LEM") do not provide any guarantee or warranty, expressed or implied, regarding the accuracy or completeness of this information and are not liable for any consequences resulting from its use. LEM shall not be responsible for any indirect, incidental, punitive, special, or consequential damages (including, but not limited to, lost profits, lost savings, business interruption, costs related to the removal or replacement of products, or rework charges) regardless of whether such damages arise from tort (including negligence), warranty, breach of contract, or any other legal theory.

LEM reserves the right to update the information in this document, including specifications and product descriptions, at any time without prior notice. Information in this document replaces any previous versions of this document. No license to any intellectual property is granted by LEM through this document, either explicitly or implicitly. Any Information and product described herein is subject to export control regulations.

LEM products may possess either unidentified or documented vulnerabilities. It is the sole responsibility of the purchaser to design and operate their applications and products in a manner that mitigates the impact of these vulnerabilities. LEM disclaims any liability for such vulnerabilities. Customers must select products with security features that best comply with applicable rules, regulations, and standards for their intended use. The purchaser is responsible for making final design decisions regarding its products and for ensuring compliance with all legal, regulatory, and security-related requirements, irrespective of any information or support provided by LEM.

LEM products are not intended, authorized, or warranted for use in life support, life-critical, or safety-critical systems or equipment, nor in applications where failure or malfunction of an LEM product could result in personal injury, death, or significant property or environmental damage. LEM and its suppliers do not assume liability for the inclusion and/or use of LEM products in such equipment or applications; thus, this inclusion and/or use is at the purchaser's own and sole risk. Unless explicitly stated that a specific LEM product is automotive qualified, it should not be used in automotive applications. LEM does not accept liability for the inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

Applications that are described herein are for illustrative purposes only. LEM makes no representation or warranty that LEM products will be suitable for a particular purpose, a specified use or application. The purchaser is solely responsible for the design and operation of its applications and devices using LEM products, and LEM accepts no liability for any assistance with any application or purchaser product design. It is purchaser's sole responsibility to determine whether the LEM product is suitable and fit for the purchaser's applications and products planned, as well as for the planned application and use of purchaser's third-party customer(s).

Stressing and using LEM products at or above limiting values will cause permanent damage to the LEM product and potentially to any device embedding or operating with LEM product. Limiting values are stress ratings only and operation of the LEM product at or above conditions and limits given in this document is not warranted. Continuous or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the LEM product.

LEM products are sold subject to the general terms and conditions of commercial sale, as published at www.lem.com unless otherwise agreed in a specific written agreement. LEM hereby expressly rejects the purchaser's general terms and conditions for purchasing LEM products by purchaser. Any terms and conditions contained in any document issued by the purchaser either before or after issuance of any document by LEM containing or referring to the general terms and conditions of sale are explicitly rejected and disregarded by LEM, and the document issued by the purchaser is wholly inapplicable to any sale or licensing made by LEM and is not binding in any way on LEM.

© 2025 LEM INTERNATIONAL SA – All rights reserved