


# Current Transducer LTC 1000-SF/SP33

For the electronic measurement of currents: DC, AC, pulsed..., with galvanic separation between the primary circuit and the secondary circuit.



$$I_{PN} = 1000 \text{ A}$$



## Electrical data

$I_{PN}$	Primary nominal RMS current	1000	A
$I_{PM}$	Primary current, measuring range @ $\pm 24 \text{ V}$	0 ... $\pm 3000$	A
$R_M$	Measuring resistance with $\pm 15 \text{ V}$	@ $\pm 1000 \text{ A}_{\text{max}}$	$R_{M \text{ min}}$ 0 $R_{M \text{ max}}$ 20 $\Omega$
		@ $\pm 1500 \text{ A}_{\text{max}}$	0    4 $\Omega$
	with $\pm 24 \text{ V}$	@ $\pm 1000 \text{ A}_{\text{max}}$	2    60 $\Omega$
		@ $\pm 3000 \text{ A}_{\text{max}}$	2    2 $\Omega$
$I_{SN}$	Secondary nominal RMS current	250	mA
$N_p/N_s$	Turns ratio	1 : 4000	
$U_C$	Supply voltage ( $\pm 5 \%$ )	$\pm 15 \dots 24$	V
$I_C$	Current consumption	$33 (@ \pm 24 \text{ V}) + I_S$	mA

## Accuracy - Dynamic performance data

$\epsilon_{\text{tot}}$	Total error @ $I_{PN}, T_A = 25 \text{ }^\circ\text{C}$	$< \pm 0.4$	%
$\epsilon_L$	Linearity error	$< 0.1$	%
		Max	
$I_O$	Offset current @ $I_p = 0, T_A = 25 \text{ }^\circ\text{C}$	$\pm 0.5$	mA
$I_{OT}$	Temperature variation of $I_O$	$-40 \text{ }^\circ\text{C} \dots +85 \text{ }^\circ\text{C}$ $\pm 1$	mA
$t_{D90}$	Delay time to 90 % of the final output value for $I_{PN}$ step <sup>1)</sup>	$< 1$	$\mu\text{s}$
$BW$	Frequency bandwidth ( $-1 \text{ dB}$ )	DC ... 100	kHz

## General data

$T_A$	Ambient operating temperature	$-40 \dots +85$	$^\circ\text{C}$
$T_{Ast}$	Ambient storage temperature	$-50 \dots +90$	$^\circ\text{C}$
$R_S$	Resistance of secondary winding @ $T_A = 85 \text{ }^\circ\text{C}$	26	$\Omega$
$m$	Mass	840	g
	Standards	EN 50155: 2017 <sup>2)</sup> UL 508: 2013 EN 50121-3-2: 2016	

Notes: <sup>1)</sup> For a  $di/dt = 100 \text{ A}/\mu\text{s}$   
<sup>2)</sup> Additional information available on request.

## Features

- Closed loop (compensated) current transducer using the Hall effect
- Insulating plastic case recognized according to UL 94-V0.

## Special features

- $I_{PM} = 0 \dots \pm 3000 \text{ A}$
- $N_p/N_s = 1 : 4000$
- Mounting feet compatible with LT 1000-SI/SP11
- Mounting base included
- Current direction.

## Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

## Applications

- Single or three phase inverters
- Propulsion and braking choppers
- Propulsion converters
- Auxiliary converters
- Battery chargers.

## Application Domain

- Railway (fixed installations and onboard).

**Current Transducer LTC 1000-SF/SP33**

Insulation coordination			
$U_d$	RMS voltage for AC insulation test, 50 Hz, 1 min	13.4 <sup>1)</sup>	kV
		1.5 <sup>2)</sup>	kV
$U_t$	Partial discharge RMS test voltage ( $q_m < 10$ pC)	> 2.8	kV
		Min	
$d_{cp}$	Creepage distance	55.5	mm
$d_{cl}$	Clearance	45	mm
$CTI$	Comparative tracking index (group I)	600	

**Notes:** <sup>1)</sup> Between primary and secondary + shield  
<sup>2)</sup> Between secondary and shield.

**Safety**

This transducer must be used in limited-energy secondary circuits according to IEC 61010-1.




This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply).  
 Ignoring this warning can lead to injury and/or cause serious damage.  
 This transducer is a build-in device, whose conducting parts must be inaccessible after installation.  
 A protective housing or additional shield could be used.  
 Main supply must be able to be disconnected.

## Dimensions LTC 1000-SF/SP33 (in mm)

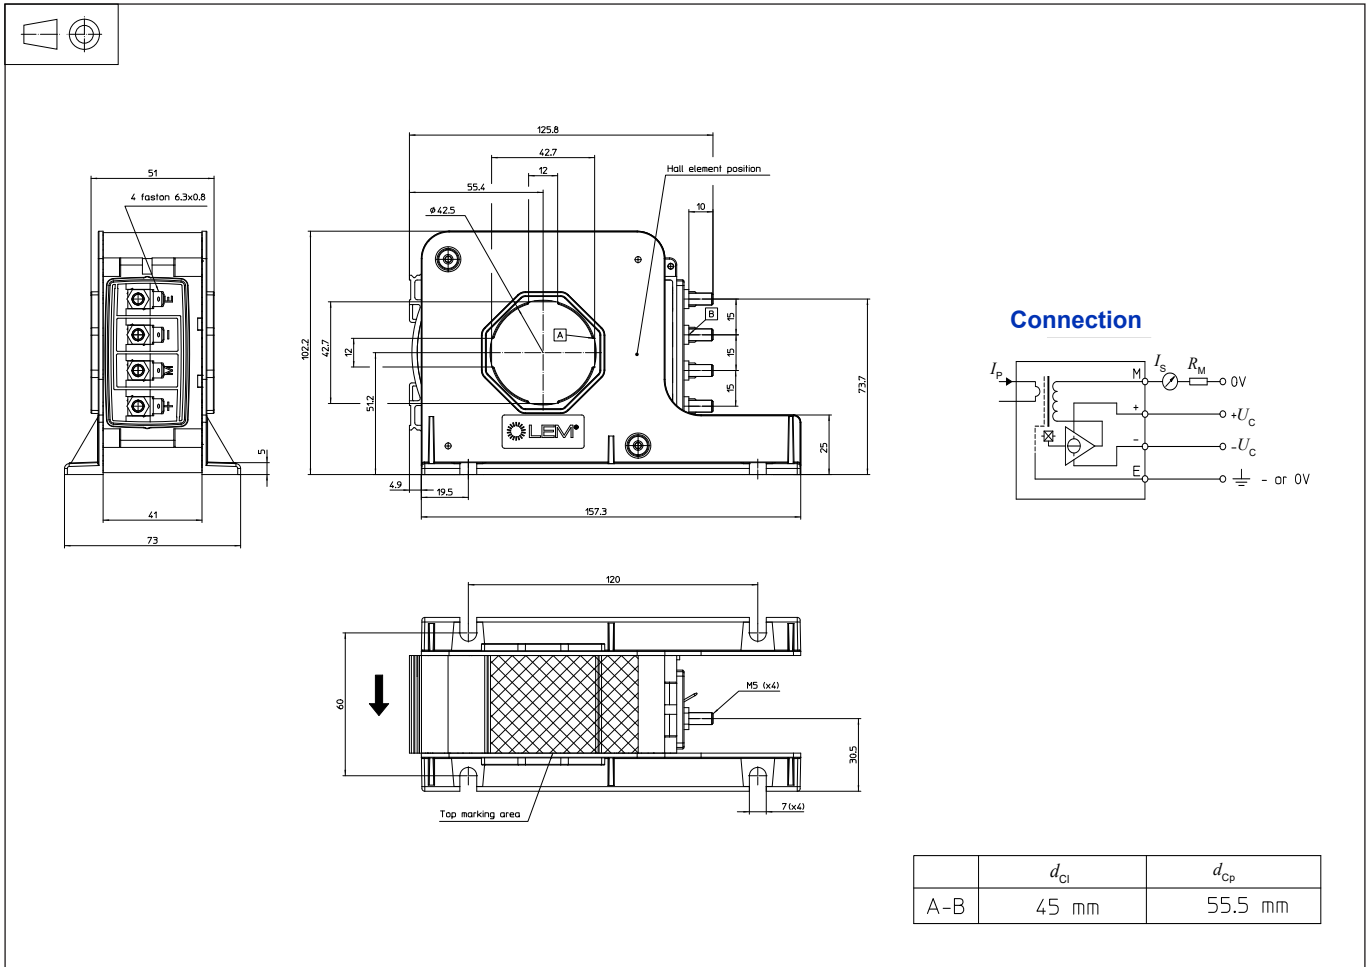

### Mechanical characteristics

- General tolerance  $\pm 1$  mm
- Transducer fastening
  - 4 notches  $\varnothing 7$  mm
  - 4 M6 steel screws
- Recommended fastening torque 4.7 N·m ( $\pm 10$  %)
- Connection of secondary
  - 4 M5 threaded studs
  - Recommended fastening torque 2.2 N·m
  - Faston 6.3 × 0.8 mm

### Remarks

- $I_s$  is positive when  $I_p$  flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 100 °C.
- Installation of the transducer must be done unless otherwise specified on the datasheet, according to LEM Transducer Generic Mounting Rules. Please refer to LEM document N°ANE120504 available on our Web site: <https://www.lem.com/en/file/3137/download/>.