



### Introduction

The HSTDR-000 family is a transducer for DC, AC, or pulsed currents measurement in high power and low voltage automotive applications. It offers a galvanic separation between the primary circuit (high power) and the secondary circuit (electronic circuit).

The HSTDR-000 family gives you a choice of having different current measuring ranges in the same housing (from  $\pm 300$  A up to  $\pm 1500$  A).

### Features

- Open Loop transducer using the Hall effect sensor
- High insulation level
- Unipolar +5 V DC power supply
- Primary current measuring range up to  $\pm 1500$  A
- Operating temperature range:  $-40\text{ }^{\circ}\text{C} < T < +125\text{ }^{\circ}\text{C}$
- Output voltage: fully ratio-metric (in sensitivity and offset).

### Special Feature

- Primary current measuring range: 600 A
- The diameter on two busbar holes : 6.05 mm
- Customized IP definition direction, see drawing.

### Advantages

- Excellent accuracy
- Very good linearity
- Very low thermal offset drift
- Very low thermal sensitivity drift
- High frequency bandwidth
- No insertion losses
- Very fast delay time.

### Automotive applications

- Starter Generators
- Inverters
- HEV applications
- EV applications
- DC / DC converters

### Principle of HSTDR-000 family

The open loop transducers uses a Hall effect integrated circuit. The magnetic flux density  $B$ , contributing to the rise of the Hall voltage, is generated by the primary current  $I_p$  to be measured.

The current to be measured  $I_p$  is supplied by a current source i.e. battery or generator (Figure 1).

Within the linear region of the hysteresis cycle,  $B$  is proportional to:

$$B(I_p) = a \times I_p$$

The Hall voltage is thus expressed by:

$$U_{\text{Hall}} = (c_{\text{Hall}} / d) \times I_{\text{Hall}} \times a \times I_p$$

Except for  $I_p$ , all terms of this equation are constant. Therefore:

$$U_{\text{Hall}} = b \times I_p$$

$a$  constant

$b$  constant

$c_{\text{Hall}}$  Hall coefficient

$d$  thickness of the Hall plate

$I_{\text{Hall}}$  current across the Hall plate

The measurement signal  $U_{\text{Hall}}$  amplified to supply the user output voltage or current.


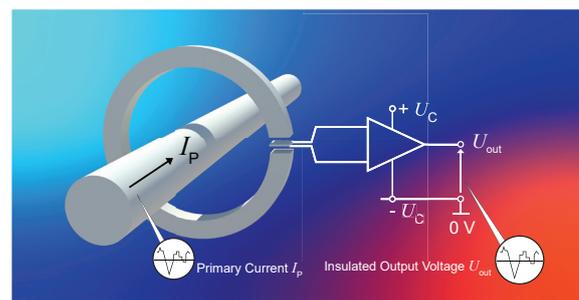


Fig. 1: Principle of the open loop transducer

**Dimensions (in mm)**  
HSTDR 600/SP2-000

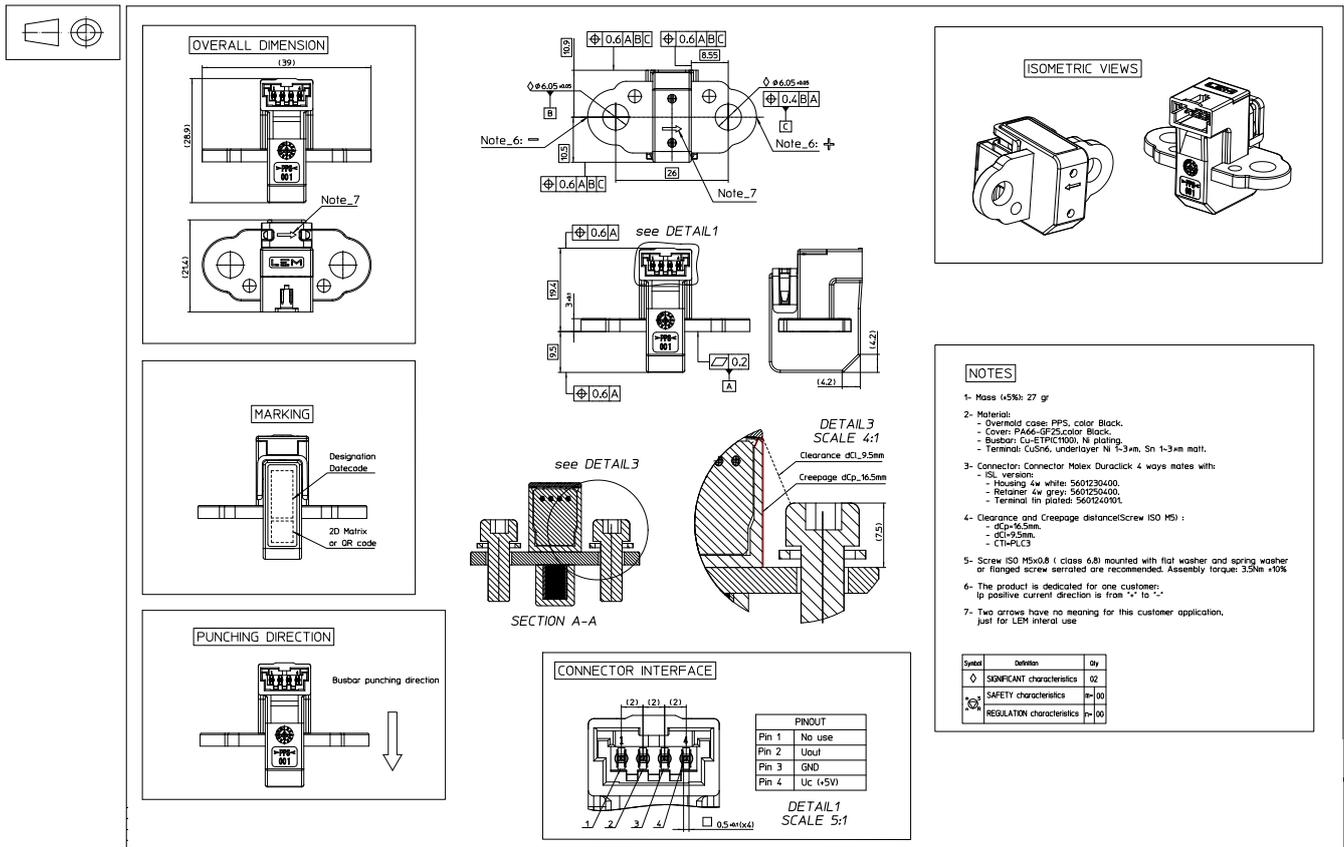

**Mechanical characteristics**

Refer to Outline Drawing.


**Mounting recommendation**

Assembly refer to Outline Drawing.

**Remark**

- $U_{out} > U_0$  when  $I_p$  flows in the positive direction (see arrow on drawing).

Electronic recommendation

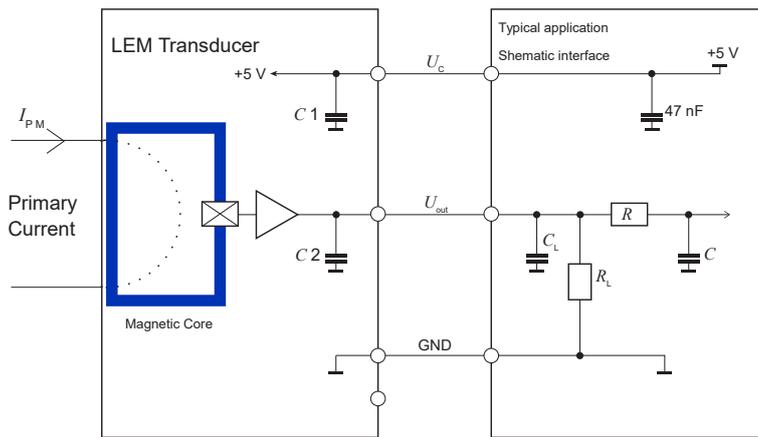

$R_L > 10 \text{ k}\Omega$  optional resistor for signal line diagnostic (optional)  
 $C_L < 2.2 \text{ nF}$  EMC protection (optional)  
 RC: low pass filter (optional)

**Absolute ratings (not operating)**

Parameter	Symbol	Unit	Specification			Conditions
			Min	Typical	Max	
Maximum supply voltage	$U_{C\max}$	V	0		8	Continuous, not operating
					6.5	Exceeding this voltage may temporarily reconfigure the circuit until $U_C$ comes back to 5 V
Ambient storage temperature	$T_{A\text{st}}$	°C	-40		125	
Electrostatic discharge voltage (HBM - Human Body Model)	$U_{\text{ESD HBM}}$	kV			8	
RMS voltage for AC insulation test	$U_d$	kV			4.7	50 Hz, 1 min, IEC 60664 part1
Creepage distance	$d_{\text{Cp}}$	mm	16.5			
Clearance	$d_{\text{Cl}}$	mm	9.5			
Comparative tracking index	$CTI$	-	PLC3			
Maximum output current	$I_{\text{out max}}$	mA	-10		10	
Maximum output voltage	$U_{\text{out max}}$	V	-0.5		$U_C + 0.5$	
Insulation resistance	$R_{\text{INS}}$	MΩ	500			1000 V DC

**Operating characteristics in nominal range ( $I_{P,N}$ )**

Parameter	Symbol	Unit	Specification			Conditions
			Min	Typical	Max	
<b>Electrical Data</b>						
Supply voltage <sup>1)</sup>	$U_C$	V	4.75	5	5.25	
Ambient operating temperature <sup>2)</sup>	$T_A$	°C	-40		125	
Load capacitance	$C_L$	nF			2.2	
Output voltage (Analog)	$U_{\text{out}}$	V	$U_{\text{out}} = (U_C / 5) \times (U_O + S \times I_P)$			
Offset voltage	$U_O$	V		2.5		@ $U_C = 5\text{ V}$
Current consumption	$I_C$	mA		15		@ $U_C = 5\text{ V}$ , @ $T_A = 25\text{ °C}$
Load resistance	$R_L$	KΩ	10			
Output internal resistance	$R_{\text{out}}$	Ω			10	DC to 1 KHz
<b>Performance Data</b>						
Ratiometricity error	$\varepsilon_r$	%		±0.3		@ $T_A = 25\text{ °C}$
Sensitivity error	$\varepsilon_s$	%		±1		@ $T_A = 25\text{ °C}$ , @ $U_C = 5\text{ V}$
Electrical offset voltage	$U_{\text{OE}}$	mV		±4		@ $T_A = 25\text{ °C}$ , @ $U_C = 5\text{ V}$
Magnetic offset voltage	$U_{\text{OM}}$	mV		±2		@ $T_A = 25\text{ °C}$ , @ $U_C = 5\text{ V}$
Average temperature coefficient of $U_{\text{OE}}$	$TCU_{\text{OEAV}}$	mV/°C	-0.08	±0.04	0.08	@ $-40\text{ °C} < T_A < 125\text{ °C}$
Average temperature coefficient of $S$	$TCS_{\text{AV}}$	%/°C	-0.03	±0.01	0.03	@ $-40\text{ °C} < T_A < 125\text{ °C}$
Linearity error	$\varepsilon_L$	% $I_{P,M}$		±1		@ $U_C = 5\text{ V}$ , @ $T_A = 25\text{ °C}$ , @ $I_P = I_{P,M}$
Delay time to 90 % of the final output value for $I_{P,N}$ step	$t_{D90}$	μs		2	6	$di/dt = 100\text{ A}/\mu\text{s}$
Frequency bandwidth <sup>3)</sup>	$BW$	kHz	40			@ -3 dB
Peak-to-peak noise voltage	$U_{\text{no pp}}$	mV		9		@ DC to 1 MHz for HSTDR 1500-000
Peak-to-peak noise voltage	$U_{\text{no pp}}$	mV		22		@ DC to 1 MHz for HSTDR 300-000
Phase shift	$\Delta\varphi$	°	-4			@ 1 kHz

**Notes:** <sup>1)</sup> The output voltage  $U_{\text{out}}$  is fully ratiometric. The offset and sensitivity are dependent on the supply voltage  $U_C$  relative to the following formula:

$$I_P = \left( \frac{5}{U_C} \times U_{\text{out}} - U_O \right) \times \frac{1}{S} \text{ with } S \text{ in (V/A)}$$


<sup>2)</sup> Absolute maximum ambient operating temperature (include busbar): +150 °C

<sup>3)</sup> Primary current frequencies must be limited in order to avoid excessive heating of the sensor higher than 125 °C.

**HSTDR 600/SP2-000**

Parameter	Symbol	Unit	Specification			Conditions
			Min	Typical	Max	
<b>Electrical Data</b>						
Primary current, measuring range	$I_{PM}$	A	-600		600	
Sensitivity	$S$	mV/A		3.33		@ $U_c = 5\text{ V}$

Total error

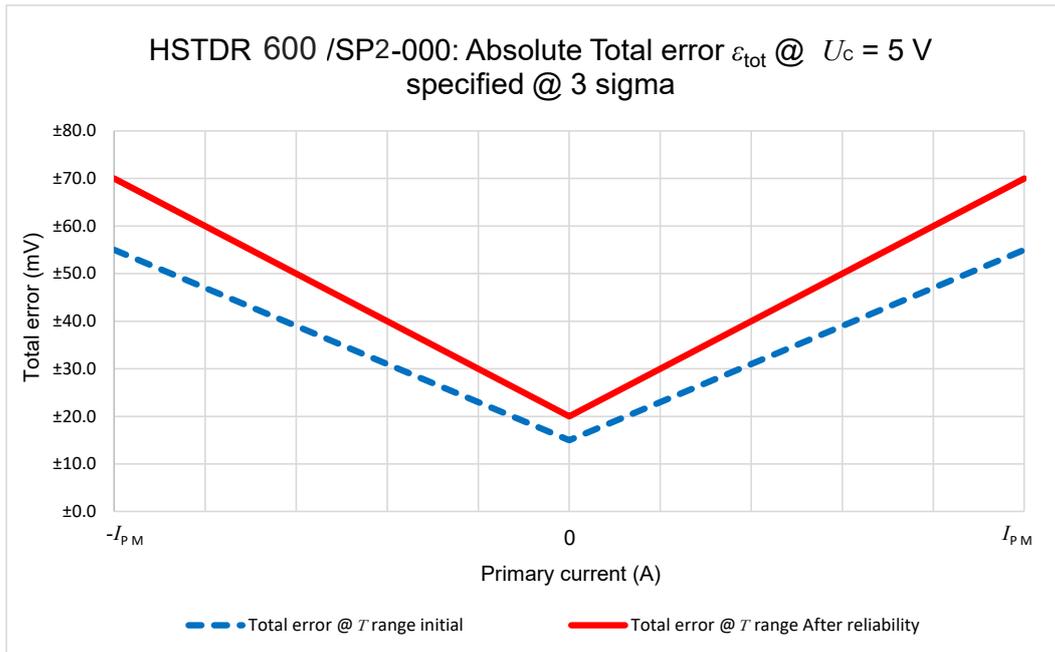


Primary current (A)	Total error $T = 25\text{ }^\circ\text{C}$ , $U_c = 5\text{ V}$ initial		Total error $-40\text{ }^\circ\text{C} \leq T \leq 125\text{ }^\circ\text{C}$ , $U_c = 5\text{ V}$ initial		Total error $T = 25\text{ }^\circ\text{C}$ , $U_c = 5\text{ V}$ After reliability		Total error $-40\text{ }^\circ\text{C} \leq T \leq 125\text{ }^\circ\text{C}$ , $U_c = 5\text{ V}$ After reliability	
	(mV)	(%)	(mV)	(%)	(mV)	(%)	(mV)	(%)
-600	±40	±2 %	±55	±2.75 %	±65	±3.25 %	±70	±3.5 %
0	±10	±0.5 %	±15	±0.75 %	±15	±0.75 %	±20	±1 %
600	±40	±2 %	±55	±2.75 %	±65	±3.25 %	±70	±3.5 %

Remark

Specific application, please refer to LEM document 'Application Note N°ANE230327' available on our Web site:  
[https://www.lem.com/sites/default/files/marketing/hstdr\\_hsndr\\_ham\\_application\\_note\\_v0.pdf](https://www.lem.com/sites/default/files/marketing/hstdr_hsndr_ham_application_note_v0.pdf)

**PERFORMANCES PARAMETERS DEFINITIONS**

**Primary current definition:**

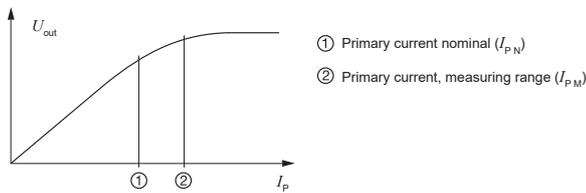

**Definition of typical, minimum and maximum values:**

Minimum and maximum values for specified limiting and safety conditions have to be understood as such as values shown in “typical” graphs. On the other hand, measured values are part of a statistical distribution that can be specified by an interval with upper and lower limits and a probability for measured values to lie within this interval. Unless otherwise stated (e.g. “100 % tested”), the LEM definition for such intervals designated with “min” and “max” is that the probability for values of samples to lie in this interval is 99.73 %. For a normal (Gaussian) distribution, this corresponds to an interval between -3 sigma and +3 sigma. If “typical” values are not obviously mean or average values, those values are defined to delimit intervals with a probability of 68.27 %, corresponding to an interval between -sigma and +sigma for a normal distribution. Typical, minimum and maximum values are determined during the initial characterization of a product.

**Output noise voltage:**


The output voltage noise is the result of the noise floor of the Hall elements and the linear amplifier.

**Magnetic offset:**

The magnetic offset is the consequence of an any current on the primary side. It’s defined after a stated excursion of primary current.


**Linearity:**

The maximum positive or negative discrepancy with a reference straight line  $U_{out} = f(I_p)$ .  
Unit: linearity (%) expressed with full scale of  $I_{pN}$ .

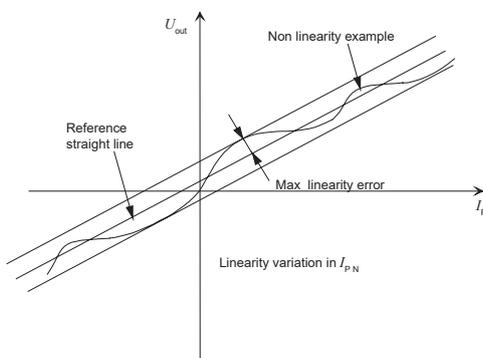

**Response time (delay time)  $t_{D90}$ :**

The time between the primary current signal ( $I_{pN}$ ) and the output signal reach at 90 % of its final value.

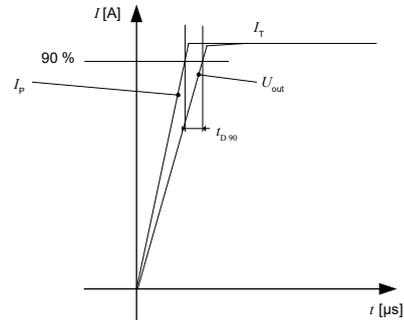

**Sensitivity:**

The transducer’s sensitivity  $S$  is the slope of the straight line

$U_{out} = f(I_p)$ , it must establish the relation:

$$U_{out}(I_p) = U_C / 5 (S \times I_p + U_O)$$

**Offset with temperature:**

The error of the offset in the operating temperature is the variation of the offset in the temperature considered with the initial offset at 25 °C.

The offset variation  $I_{OT}$  is a maximum variation the offset in the temperature range:

$$I_{OT} = I_{OE \max} - I_{OE \min}$$

The offset drift  $TCI_{OE \text{ AV}}$  is the  $I_{OT}$  value divided by the temperature range.

**Sensitivity with temperature:**

The error of the sensitivity in the operating temperature is the relative variation of sensitivity with the temperature considered with the initial offset at 25 °C.

The sensitivity variation  $S_T$  is the maximum variation (in ppm or %) of the sensitivity in the temperature range:

$$S_T = (\text{Sensitivity max} - \text{Sensitivity min}) / \text{Sensitivity at } 25 \text{ }^\circ\text{C}$$

The sensitivity drift  $TCS_{AV}$  is the  $S_T$  value divided by the temperature range. Deeper and detailed info available is our LEM technical sales offices ([www.lem.com](http://www.lem.com)).

**Offset voltage @  $I_p = 0 \text{ A}$ :**

The offset voltage is the output voltage when the primary current is zero. The ideal value of  $U_O$  is  $U_C / 2$ . So, the difference of  $U_O - U_C / 2$  is called the total offset voltage error. This offset error can be attributed to the electrical offset (due to the resolution of the ASIC quiescent voltage trimming), the magnetic offset, the thermal drift and the thermal hysteresis. Deeper and detailed info available is our LEM technical sales offices ([www.lem.com](http://www.lem.com)).

**Environmental test specifications:**

Refer to LEM GROUP test plan laboratory CO.11.11.515.0 with “Tracking\_Test Plan\_Auto” sheet.

**Validation test specifications**

Name	Standard	Condition
<b>ELECTRICAL TESTS</b>		
Frequency bandwidth	LEM 98.20.00.538.0	30 Hz to 100 kHz; At 20 A peak ; ≥ 40 kHz @ -3 dB
Phase delay	LEM 98.20.00.538.0	Power supply 5 V, $I_p = 0$ A 30 Hz to 100 kHz; At 20 A peak
Output voltage Noise (peak-to-peak)	LEM 98.20.00.575.0	Sweep from DC to 1 MHz
Delay time ; $di/dt$	LEM 98.20.00.545.0	100 A/μs ; $t_{D90}$ of $I_{PN} \leq 6$ μs
$du/dt$	LEM 98.20.00.545.0	Slope: 5 kV/μs $U = 1000$ V
<b>ENVIRONMENTAL TESTS</b>		
Ageing 85 °C /85 % RH	JESD 22-A101 (03/2009)	85 °C/85 % RH; Duration = 1000 h; Power supply 5 V ; primary current 0 A; Monitoring output 1 time/hr
Low temperature operating endurance	ISO 16750-4 § 5.1.1.2 (04/2010)	-40 °C, 24 h; Power supply 5 V Monitoring: 2 times/hr
High temperature operating endurance	ISO 16750-4 § 5.1.2.2 (04/2010)	Temperature 125 °C; 96 h; power supply 5 V Monitoring 2 times/hr
High temperature storage	AQG 324 (2019) § 9.4	$T = 125$ °C; Duration = 1000 h; $U_C =$ no powersupply (unconnected)
Low temperature storage	ISO 16750-4 5.1.1.1(2006)	$T = -40$ °C; Duration = 1000 h; $U_C =$ no powersupply (unconnected)
Humidity heat, cyclic test: Test 2 Composite temperature/humidity cyclic test	ISO 16750-4 § 5.6.2.3 (04/2010)	Temperature range -10 °C/ +65 °C, 93 % RH Duration = 240 h (10 cycles)
Thermal shock	ISO 16750-4 § 5.3.2 (04/2010)	Temperature range -40 °C& 125 °C, 300 cycles; 40 min/40 min, no power supply
Sinus Vibration	ISO 16750-3 § 4.1.2.2.2.2 (12/2012)	Monitoring $U_C$ and $U_{out}$ is mandatory, Temperature -40/125 °C, 22 H/axis, 100 Hz to 440 Hz Sweep: ≤ 0.5 oct/min
Random Vibration	ISO 16750-3 § 4.1.2.2.2.3 (12/2012)	Monitoring $U_C$ and $U_{out}$ is mandatory, Temperature -40/125 °C, 22 H/axis, 10 to 2000 Hz 10 G (RMS)
Mechanical Shocks	ISO 16750-3 § 4.2.2 (12/2012)	Operating mode: 3.2 Pulse shape: half sine, 50 G, 6 ms 10 shocks per direction (total 60)
Free Fall	ISO 16750-3 § 4.3 (12/2012)	3 pcs, Falls/DUT: 2 times, Height = 1 m 3 axes, 2 directions by axis, Operating mode: 1.1
Cross section checking on PCBA	IPC-A-610G: 2017 Class 3W	IPC-TM-650 2.1.1F:2015
Cross section checking on solderless connections	GB/T 18290.5-2015	IPC-TM-650 2.1.1F:2015
Whisker checking on PCBA	Refer to JESD201-A (04/2010)	Refer to JESD22-A121A (04/2010) Class 2
Whisker checking on PIN	Refer to JESD201-A (04/2010)	Refer to JESD22-A121A (04/2010) Class 2
<b>INSULATION TESTS</b>		
Dielectric withstand voltage	ISO 16750-2 § 4.11 (11/2012)	4.7 kV test voltage, time = 60 s, No dielectric breakdown, no flash-over, functional after test
Insulation test	ISO 16750-2 § 4.12 (11/2012)	1000 V DC, time = 60 s, $R_{INS} \geq 500$ MΩ Minimum

**EMC TESTS**

Immunity to Electrostatic Discharges (Handling of devices)	ISO 10605 (07/2008)	Discharge module: 150 pF/2000 Ω Contact discharges: ±4.6 kV, Air discharges: ±8 kV $U_c$ = NO power supply, Criteria B
Immunity to Radiated disturbances (ALSE)	ISO 11452-2 (2019)	Power supply: 5 V $f$ = 400 MHz to 1 GHz; Level = 100 V/m (CW, AM 80 %) $f$ = 0.8 GHz to 2 GHz; Level = 70 V/m (CW, PM PRR = 217 Hz) $f$ = 1 GHz to 2 GHz; Level = 70 V/m (CW) Criteria A acceptance @ 5 % of 2 V
Immunity to Conducted disturbances (BCI)	ISO 11452-4 (12/2011)	Level = see Annex E Fig. & Table E.1 (Test Level II) $f$ = 1 MHz to 400 MHz Criteria A acceptance @ 5 % of 2 V
Emission Radiated (ALSE)	CISPR 25 §6.5 (2016)	Table 7, Class 5 by default $f$ = 150 kHz to 2.5 GHz Load simulator will be provided (R&D)

## IMPORTANT NOTICE

The information in this document is considered accurate and reliable. However, LEM International SA and any company directly or indirectly controlled by LEM Holding SA ("LEM") do not provide any guarantee or warranty, expressed or implied, regarding the accuracy or completeness of this information and are not liable for any consequences resulting from its use. LEM shall not be responsible for any indirect, incidental, punitive, special, or consequential damages (including, but not limited to, lost profits, lost savings, business interruption, costs related to the removal or replacement of products, or rework charges) regardless of whether such damages arise from tort (including negligence), warranty, breach of contract, or any other legal theory.

LEM reserves the right to update the information in this document, including specifications and product descriptions, at any time without prior notice. Information in this document replaces any previous versions of this document. No license to any intellectual property is granted by LEM through this document, either explicitly or implicitly. Any Information and product described herein is subject to export control regulations.

LEM products may possess either unidentified or documented vulnerabilities. It is the sole responsibility of the purchaser to design and operate their applications and products in a manner that mitigates the impact of these vulnerabilities. LEM disclaims any liability for such vulnerabilities. Customers must select products with security features that best comply with applicable rules, regulations, and standards for their intended use. The purchaser is responsible for making final design decisions regarding its products and for ensuring compliance with all legal, regulatory, and security-related requirements, irrespective of any information or support provided by LEM.

LEM products are not intended, authorized, or warranted for use in life support, life-critical, or safety-critical systems or equipment, nor in applications where failure or malfunction of an LEM product could result in personal injury, death, or significant property or environmental damage. LEM and its suppliers do not assume liability for the inclusion and/or use of LEM products in such equipment or applications; thus, this inclusion and/or use is at the purchaser's own and sole risk. Unless explicitly stated that a specific LEM product is automotive qualified, it should not be used in automotive applications. LEM does not accept liability for the inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

Applications that are described herein are for illustrative purposes only. LEM makes no representation or warranty that LEM products will be suitable for a particular purpose, a specified use or application. The purchaser is solely responsible for the design and operation of its applications and devices using LEM products, and LEM accepts no liability for any assistance with any application or purchaser product design. It is purchaser's sole responsibility to determine whether the LEM product is suitable and fit for the purchaser's applications and products planned, as well as for the planned application and use of purchaser's third-party customer(s).

Stressing and using LEM products at or above limiting values will cause permanent damage to the LEM product and potentially to any device embedding or operating with LEM product. Limiting values are stress ratings only and operation of the LEM product at or above conditions and limits given in this document is not warranted. Continuous or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the LEM product.

LEM products are sold subject to the general terms and conditions of commercial sale, as published at [www.lem.com](http://www.lem.com) unless otherwise agreed in a specific written agreement. LEM hereby expressly rejects the purchaser's general terms and conditions for purchasing LEM products by purchaser. Any terms and conditions contained in any document issued by the purchaser either before or after issuance of any document by LEM containing or referring to the general terms and conditions of sale are explicitly rejected and disregarded by LEM, and the document issued by the purchaser is wholly inapplicable to any sale or licensing made by LEM and is not binding in any way on LEM.

**© 2025 LEM INTERNATIONAL SA – All rights reserved**