


For the electronic measurement of current: DC, AC, pulsed..., with galvanic separation between the primary and the secondary circuit.

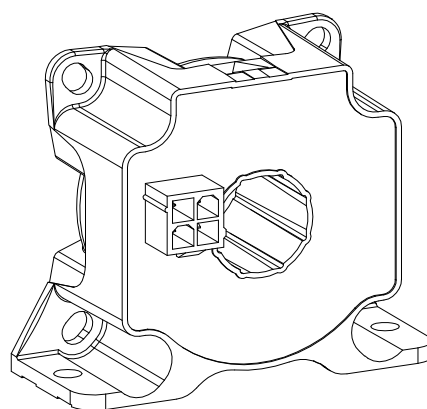

## Features

- Bipolar and insulated current measurement
- Current output
- Closed loop (compensated) current transducer
- Panel mounting.

## Special Features

- $I_{PN} = 100\text{ A}$
- $I_{PM} = 0 \dots \pm 200\text{ A}$
- $N_s = 1000$  turns
- Connection to secondary circuit on MOLEX Mini-Fit Jr. 5566 (gold plated).

## Advantages

- High accuracy
- Very low offset drift over temperature.

## Applications

- Single or three phase inverters
- Propulsion and braking choppers
- Propulsion converters
- Auxiliary converters
- Battery chargers
- Substations.

## Standards

- EN 50121-3-2: 2015
- EN 50155: 2017
- IEC 62497-1: 2010
- UL 508: 2013.

## Application Domain

- Railway (fixed installations and onboard).

## Absolute maximum ratings

| Parameter                                               | Symbol           | Unit | Value       |
|---------------------------------------------------------|------------------|------|-------------|
| Maximum supply voltage (working) (-50 °C ... 85 °C)     | $\pm U_{C \max}$ | V    | $\pm 15.75$ |
| Maximum primary conductor temperature                   | $T_{B \max}$     | °C   | 100         |
| Maximum steady state primary current (-50 °C ... 85 °C) | $I_{P N \max}$   | A    | 100         |

Stresses above these ratings may cause permanent damage.  
Exposure to absolute maximum ratings for extended periods may degrade reliability.

## UL 508: Ratings and assumptions of certification

File # E189713 Volume: 2 Section: 9

### Standards

- USR indicates investigation to the Standard for Industrial Control Equipment UL 508.
- CNR indicates investigation to the Canadian standard for Industrial Control Equipment CSA C22.2 No. 14-13.

### Ratings

| Parameter                           | Unit    | Value             |
|-------------------------------------|---------|-------------------|
| Primary involved potential          | V AC/DC | 1500              |
| Maximum surrounding air temperature | °C      | 85                |
| Primary current                     | A       | 0 ... 100         |
| Secondary supply voltage            | V DC    | 0 ... $\pm 15.75$ |
| Secondary current                   | mA      | 0 ... 100         |

### Conditions of acceptability

When installed in the end-use equipment, with primary feedthrough potential involved of 1500 V AC/DC, consideration shall be given to the following:

- 1 - These products must be mounted in a suitable end-use enclosure.
- 2 - The secondary pin terminals have not been evaluated for field wiring.
- 3 - Low voltage control circuit shall be supplied by an isolating source (such as transformer, optical isolator, limiting impedance or electro-mechanical relay).
- 4 - Based on the temperature test performed on LF 210-S series, the primary bar or conductor shall not exceed 100 °C in the end use application.
- 5 - LF 210-S series shall be used in a pollution degree 2.

### Marking

Only those products bearing the UL or UR Mark should be considered to be Listed or Recognized and covered under UL's Follow-Up Service. Always look for the Mark on the product.

**Insulation coordination**

| Parameter                                           | Symbol   | Unit | Value | Comment                                                                          |
|-----------------------------------------------------|----------|------|-------|----------------------------------------------------------------------------------|
| RMS voltage for AC insulation test, 50 Hz, 1 min    | $U_d$    | kV   | 3.5   | Type test                                                                        |
| Impulse withstand voltage 1.2/50 $\mu$ s            | $U_{Ni}$ | kV   | 7.6   |                                                                                  |
| Clearance (pri. - sec.)                             | $d_{Cl}$ | mm   | 7.5   | Shortest distance through air                                                    |
| Creepage distance (pri. - sec.)                     | $d_{Cp}$ | mm   | 20.2  | Shortest path along device body                                                  |
| Application example<br>Rated insulation RMS voltage | $U_{Nm}$ | V    | 920   | Basic insulation (interpolated)<br>according to IEC 62497-1<br>CAT III, PD2      |
| Application example<br>Rated insulation RMS voltage | $U_{Nm}$ | V    | 413   | Reinforced insulation (interpolated)<br>according to IEC 62497-1<br>CAT III, PD2 |
| Case material                                       | -        | -    | V0    | According to UL 94                                                               |
| Comparative tracking index                          | $CTI$    |      | 600   |                                                                                  |

**Environmental and mechanical characteristics**

| Parameter                                      | Symbol | Unit | Min | Typ | Max | Comment       |
|------------------------------------------------|--------|------|-----|-----|-----|---------------|
| Ambient operating temperature                  | $T_A$  | °C   | -40 |     | 85  |               |
| Ambient storage temperature                    | $T_S$  | °C   | -50 |     | 85  |               |
| Equipment operating temperature class          |        |      |     |     |     | EN 50155: OT6 |
| Switch-on extended operating temperature class |        |      |     |     |     | EN 50155: ST0 |
| Rapid temperature variation class              |        |      |     |     |     | EN 50155: H2  |
| Conformal coating type                         |        |      |     |     |     | EN 50155: NA  |
| Mass                                           | $m$    | g    |     | 75  |     |               |

**RAMS data**

| Parameter         | Symbol          | Unit     | Min | Typ       | Max                                                                                                                             |
|-------------------|-----------------|----------|-----|-----------|---------------------------------------------------------------------------------------------------------------------------------|
| Useful life class |                 |          |     |           | EN 50155: L4                                                                                                                    |
| Mean failure rate | $\bar{\lambda}$ | $h^{-1}$ |     | 1/1984154 | According to IEC 62380: 2004<br>$T_A = 40$ °C<br>ON: 24 h/day<br>ON/OFF: 365 cycles/year<br>$U_C = \pm 15$ V, $I_p = 100$ A RMS |

## Electrical data

At  $T_A = 25\text{ °C}$ ,  $\pm U_C = \pm 15\text{ V}$ ,  $R_M = 1\text{ }\Omega$ , unless otherwise noted.

Lines with a \* in the conditions column apply over the  $-40 \dots 85\text{ °C}$  ambient temperature range.

| Parameter                                                           | Symbol              | Unit          | Min             | Typ                      | Max         | Conditions                                                                                                                                                      |
|---------------------------------------------------------------------|---------------------|---------------|-----------------|--------------------------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Primary nominal RMS current                                         | $I_{PN}$            | A             |                 |                          | 100         | *                                                                                                                                                               |
| Primary current, measuring range                                    | $I_{PM}$            | A             | -200            |                          | 200         | *                                                                                                                                                               |
| Measuring resistance                                                | $R_M$               | $\Omega$      | 0 <sup>1)</sup> |                          |             | * Max value of $R_M$ is given in <a href="#">Figure 1</a>                                                                                                       |
| Secondary nominal RMS current                                       | $I_{SN}$            | A             | -0.1            |                          | 0.1         | *                                                                                                                                                               |
| Resistance of secondary winding                                     | $R_S$               | $\Omega$      |                 |                          | 8.5         | $R_S(T_A) = R_S \times (1 + 0.004 \times (T_A + \Delta\text{temp} - 25))$<br>Estimated temperature increase<br>@ $I_{PN}$ is $\Delta\text{temp} = 15\text{ °C}$ |
| Secondary current                                                   | $I_S$               | A             | -0.20           |                          | 0.20        | *                                                                                                                                                               |
| Number of secondary turns                                           | $N_S$               |               |                 | 1000                     |             |                                                                                                                                                                 |
| Nominal sensitivity                                                 | $S_N$               | mA/A          |                 | 1                        |             |                                                                                                                                                                 |
| Supply voltage                                                      | $\pm U_C$           | V             | $\pm 11.4$      |                          | $\pm 15.75$ | *                                                                                                                                                               |
| Current consumption                                                 | $I_C$               | mA            |                 | $33 + I_S$<br>$35 + I_S$ |             | $\pm U_C = \pm 12\text{ V}$<br>$\pm U_C = \pm 15\text{ V}$                                                                                                      |
| Inrush current                                                      |                     |               |                 |                          |             | NA (EN 50155)                                                                                                                                                   |
| Interruptions on power supply voltage class                         |                     |               |                 |                          |             | NA (EN 50155)                                                                                                                                                   |
| Supply change-over class                                            |                     |               |                 |                          |             | NA (EN 50155)                                                                                                                                                   |
| Offset current, referred to primary                                 | $I_O$               | A             | -0.15           |                          | 0.15        |                                                                                                                                                                 |
| Temperature variation of $I_O$ , referred to primary                | $I_{OT}$            | A             | -0.2            |                          | 0.2         | *                                                                                                                                                               |
| Magnetic offset current (@ $3 \times I_{PN}$ ), referred to primary | $I_{OM}$            | A             |                 | $\pm 0.2$                |             |                                                                                                                                                                 |
| Sensitivity error                                                   | $\varepsilon_S$     | %             | -0.15           |                          | 0.15        | *                                                                                                                                                               |
| Linearity error                                                     | $\varepsilon_L$     | % of $I_{PN}$ | -0.05           |                          | 0.05        | *                                                                                                                                                               |
| Total error at $I_{PN}$                                             | $\varepsilon_{tot}$ | % of $I_{PN}$ | -0.2<br>-0.2    |                          | 0.2<br>0.2  | * 25 ... 85 °C<br>-40 ... 85 °C                                                                                                                                 |
| RMS noise current referred to primary                               | $I_{no}$            | mA            |                 | 20                       |             | 1 Hz to 100 kHz (see <a href="#">Figure 4</a> )                                                                                                                 |
| Delay time to 10 % of the final output value for $I_{PN\_step}$     | $t_{D10}$           | $\mu\text{s}$ |                 | < 0.5                    |             | 0 to 200 A, 75 A/ $\mu\text{s}$ , $R_M = 10\text{ }\Omega$                                                                                                      |
| Delay time to 90 % of the final output value for $I_{PN\_step}$     | $t_{D90}$           | $\mu\text{s}$ |                 | < 0.5                    |             | 0 to 200 A, 75 A/ $\mu\text{s}$ , $R_M = 10\text{ }\Omega$<br>(see <a href="#">Figure 2</a> )                                                                   |
| Frequency bandwidth                                                 | $BW$                | kHz           |                 | 100                      |             | $R_M = 50\text{ }\Omega$ ; -3 dB                                                                                                                                |

**Note:** <sup>1)</sup> With  $\pm 15$  as power supply. Other values of minimum values according to conditions of use are given in [Figure 1](#).

## Definition of typical, minimum and maximum values

Minimum and maximum values for specified limiting and safety conditions have to be understood as such as well as values shown in "typical" graphs. On the other hand, measured values are part of a statistical distribution that can be specified by an interval with upper and lower limits and a probability for measured values to lie within this interval. Unless otherwise stated (e.g. "100 % tested"), the LEM definition for such intervals designated with "min" and "max" is that the probability for values of samples to lie in this interval is 99.73 %. For a normal (Gaussian) distribution, this corresponds to an interval between -3 sigma and +3 sigma. If "typical" values are not obviously mean or average values, those values are defined to delimit intervals with a probability of 68.27 %, corresponding to an interval between -sigma and +sigma for a normal distribution.

Typical, minimum and maximum values are determined during the initial characterization of the product.

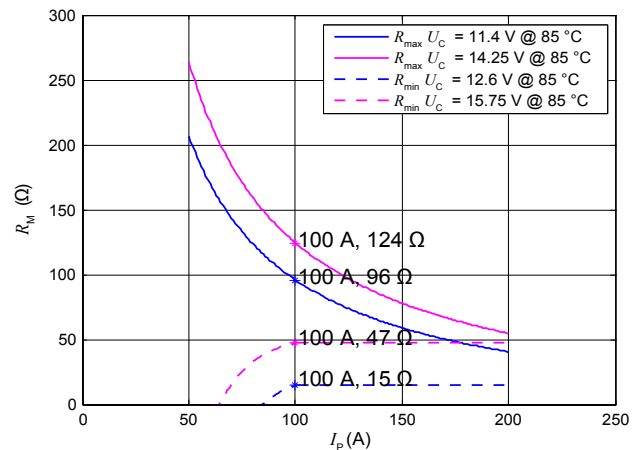
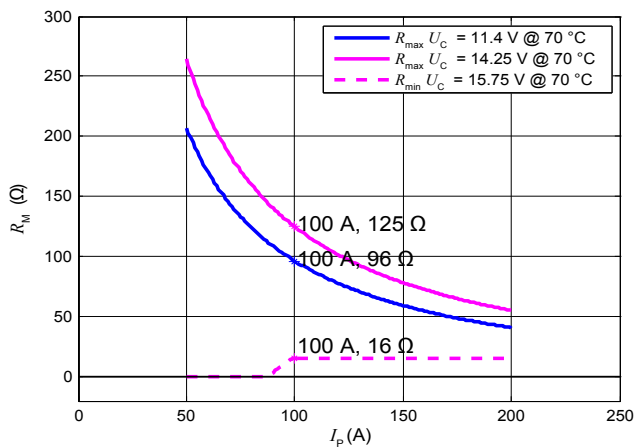


Figure 1: Maximum measuring resistance

$$R_{M \max} = N_S \times \frac{U_{C \min} - 0.3 \text{ V}}{I_P} - R_{S \max} - 4.1 \Omega$$

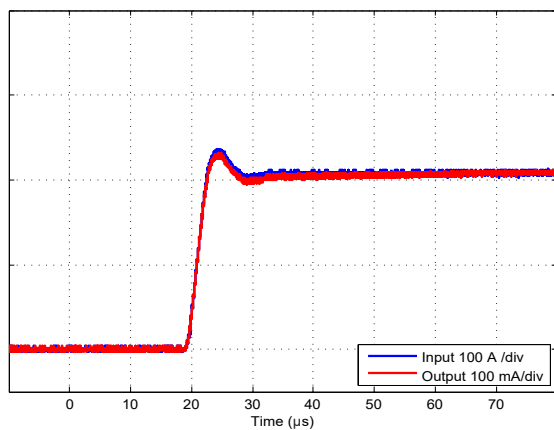


Figure 2: Typical delay time (0 to 200 A, 75 A/μs, with  $R_M = 10 \Omega$ )

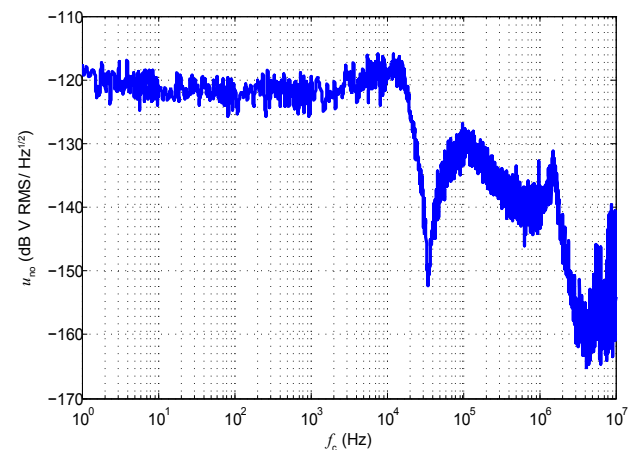


Figure 3: Typical noise voltage spectral density referred to primary  $u_{no}$  with  $R_M = 10 \Omega$

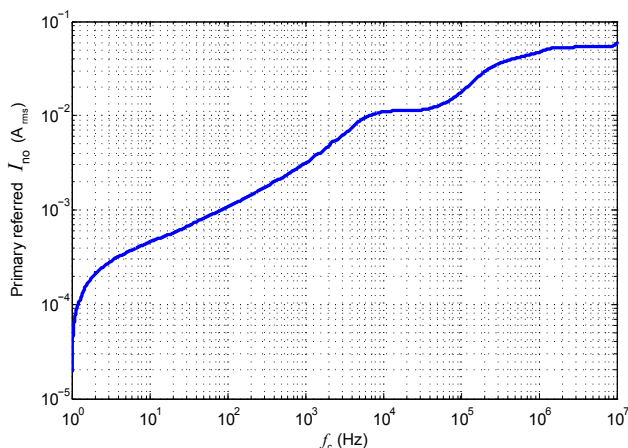


Figure 4: Typical RMS noise current referred to primary with  $R_M = 10 \Omega$

To calculate the noise in a frequency band  $f_1$  to  $f_2$ , the formula is:

$$I_{no}(f_1 \dots f_2) = \sqrt{I_{no}(f_2)^2 - I_{no}(f_1)^2}$$

with  $I_{no}(f)$  read from figure 4 (typical, RMS value).

Example:

What is the noise from  $10^3$  to  $10^6$  Hz?

Figure 4 gives  $I_{no}(10^3 \text{ Hz}) = 3 \text{ mA}$

and  $I_{no}(10^6 \text{ Hz}) = 50 \text{ mA}$ .

The output RMS noise current is therefore:

$$\sqrt{(50 \times 10^{-3})^2 - (3 \times 10^{-3})^2} = 50 \text{ mA referred to primary}$$

## Typical performance characteristics continued

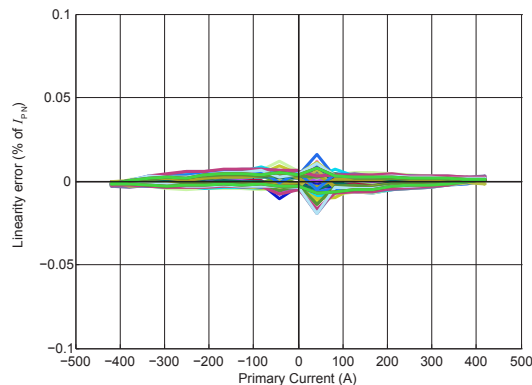


Figure 5: Linearity

## Performance parameters definition

### Sensitivity and linearity

To measure sensitivity and linearity, the primary current (DC) is cycled from 0 to  $I_{PM}$ , then to  $-I_{PM}$  and back to 0 (equally spaced  $I_{PM}/10$  steps).

The sensitivity  $S$  is defined as the slope of the linear regression line for a cycle between  $\pm I_{PM}$ .

The linearity error  $\varepsilon_L$  is the maximum positive or negative difference between the measured points and the linear regression line, expressed in % of the maximum measured value.

### Magnetic offset

The magnetic offset  $I_{OM}$  is the change of offset after a given current has been applied to the input. It is included in the linearity error as long as the transducer remains in its measuring range.

### Electrical offset

The electrical offset current  $I_{OE}$  is the residual output current when the input current is zero.

### Total error

The total error  $\varepsilon_{tot}$  is the error at  $\pm I_{PN}$ , relative to the rated value  $I_{PN}$ .

It includes all errors mentioned above.

### Delay times

The delay time  $t_{D10}$  @ 10 % and the delay time  $t_{D90}$  @ 90 % with respect to the primary are shown in the next figure.

Both slightly depend on the primary current  $di/dt$ .

They are measured at nominal current.


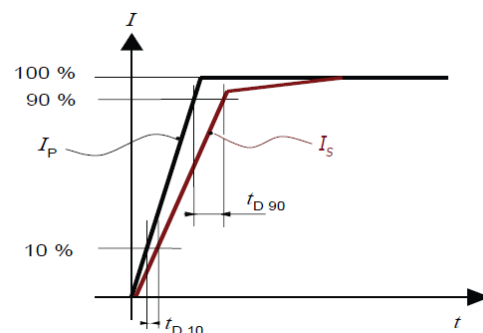


Figure 6:  $t_{D10}$  (delay time @ 10 %) and  $t_{D90}$  (delay time @ 90 %)

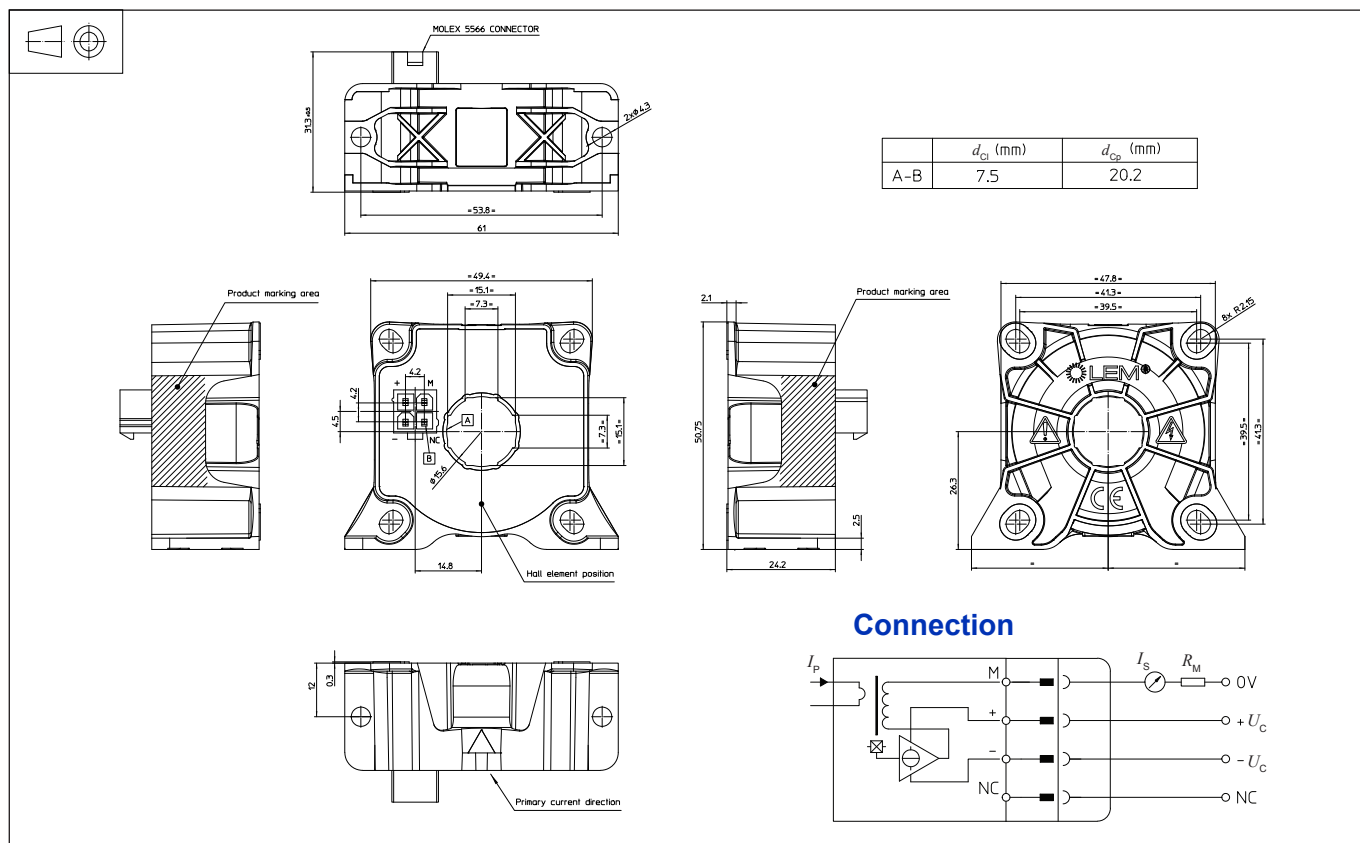

## Mechanical characteristics

- General tolerance  $\pm 0.3$  mm
- Transducer fastening  
Vertical position  
2 holes  $\varnothing 4.3$  mm  
2 M4 steel screws  
Recommended fastening torque  $2.1 \text{ N}\cdot\text{m} (\pm 10 \%)$
- Transducer fastening  
Horizontal position  
4 holes  $\varnothing 4.3$  mm  
4 M4 steel screws  
Recommended fastening torque  $2.1 \text{ N}\cdot\text{m} (\pm 10 \%)$
- Connection of secondary MOLEX 5566
- Primary through hole  $\varnothing 15.59$  mm

## Remarks

- $I_s$  is positive when  $I_p$  flows in the direction of arrow.
- The secondary cables also have to be routed together all the way.
- Installation of the transducer is to be done without primary current or secondary voltage present.
- Maximum temperature of primary conductor: see [page 2](#).
- Installation of the transducer must be done unless otherwise specified on the datasheet, according to LEM Transducer Generic Mounting Rules. Please refer to LEM document N°ANE120504 available on our Web site: <https://www.lem.com/en/file/3137/download>.

## Safety

This transducer must be used in limited-energy secondary circuits according to IEC 61010-1.



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (e.g. primary connection, power supply).

Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a build-in device, whose conducting parts must be inaccessible after installation.

A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

*Note: Additional information available on request.*

## IMPORTANT NOTICE

The information in this document is considered accurate and reliable. However, LEM International SA and any company directly or indirectly controlled by LEM Holding SA ("LEM") do not provide any guarantee or warranty, expressed or implied, regarding the accuracy or completeness of this information and are not liable for any consequences resulting from its use. LEM shall not be responsible for any indirect, incidental, punitive, special, or consequential damages (including, but not limited to, lost profits, lost savings, business interruption, costs related to the removal or replacement of products, or rework charges) regardless of whether such damages arise from tort (including negligence), warranty, breach of contract, or any other legal theory.

LEM reserves the right to update the information in this document, including specifications and product descriptions, at any time without prior notice. Information in this document replaces any previous versions of this document. No license to any intellectual property is granted by LEM through this document, either explicitly or implicitly. Any Information and product described herein is subject to export control regulations.

LEM products may possess either unidentified or documented vulnerabilities. It is the sole responsibility of the purchaser to design and operate their applications and products in a manner that mitigates the impact of these vulnerabilities. LEM disclaims any liability for such vulnerabilities. Customers must select products with security features that best comply with applicable rules, regulations, and standards for their intended use. The purchaser is responsible for making final design decisions regarding its products and for ensuring compliance with all legal, regulatory, and security-related requirements, irrespective of any information or support provided by LEM.

LEM products are not intended, authorized, or warranted for use in life support, life-critical, or safety-critical systems or equipment, nor in applications where failure or malfunction of an LEM product could result in personal injury, death, or significant property or environmental damage. LEM and its suppliers do not assume liability for the inclusion and/or use of LEM products in such equipment or applications; thus, this inclusion and/or use is at the purchaser's own and sole risk. Unless explicitly stated that a specific LEM product is automotive qualified, it should not be used in automotive applications. LEM does not accept liability for the inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

Applications that are described herein are for illustrative purposes only. LEM makes no representation or warranty that LEM products will be suitable for a particular purpose, a specified use or application. The purchaser is solely responsible for the design and operation of its applications and devices using LEM products, and LEM accepts no liability for any assistance with any application or purchaser product design. It is purchaser's sole responsibility to determine whether the LEM product is suitable and fit for the purchaser's applications and products planned, as well as for the planned application and use of purchaser's third-party customer(s).

Stressing and using LEM products at or above limiting values will cause permanent damage to the LEM product and potentially to any device embedding or operating with LEM product. Limiting values are stress ratings only and operation of the LEM product at or above conditions and limits given in this document is not warranted. Continuous or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the LEM product.

LEM products are sold subject to the general terms and conditions of commercial sale, as published at [www.lem.com](http://www.lem.com) unless otherwise agreed in a specific written agreement. LEM hereby expressly rejects the purchaser's general terms and conditions for purchasing LEM products by purchaser. Any terms and conditions contained in any document issued by the purchaser either before or after issuance of any document by LEM containing or referring to the general terms and conditions of sale are explicitly rejected and disregarded by LEM, and the document issued by the purchaser is wholly inapplicable to any sale or licensing made by LEM and is not binding in any way on LEM.

© 2025 LEM INTERNATIONAL SA – All rights reserved